


WAAS CH 45838 W11A	APP CRS 109°	Rwy Ldg 5400 TDZE 97 Apt Elev 97
--	------------------------	---

RNAV (GPS) RWY 11

ANIAK (ANI)(PANI)

RNP APCH.		
⚠ ⚠ ⚠ Circling NA north of Rwy 11-29. Rwy 11 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV, LNAV/VNAV all Cats, LNAV Cat A. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 2 ½ SM.	MALSF ⚠ ⚠	MISSED APPROACH: Climb to 1500 then climbing right turn to 3500 direct IKUFU and hold, continue climb-in-hold to 3500.

AWOS-3P 124.3	ANCHORAGE CENTER 118.15 251.05	CLNC DEL 118.15	CTAF 122.1
-------------------------	--	---------------------------	----------------------

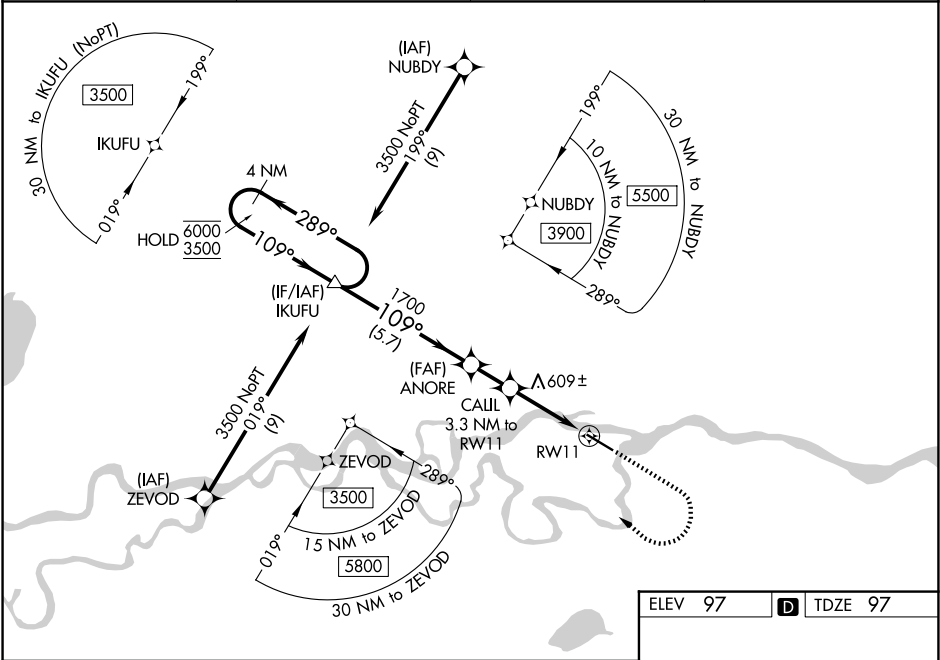

4 NM Holding Pattern		IKUFU		ANORE		CAUL		RW11					
6000		3500		1700		3500		1500					
GP 3.00°		TCH 35		*1160		*2.3 NM to RW11		*LNAV only					
5.7 NM		1.6 NM		1 NM		2.3 NM							
CATEGORY	A	B	C	D									
LPV DA	347-1 250 (300-1)												
LNAV/VNAV DA	994-4 897 (900-4)												
LNAV MDA	860-1	763 (800-1)	860-2	763 (800-2)									
CIRCLING	860-1	860-1¼	860-2½	1200-3									
	763 (800-1)	763 (800-1¼)	763 (800-2½)	1103 (1200-3)									

