

|                                       |                 |                                        |
|---------------------------------------|-----------------|----------------------------------------|
| VORTAC AKN<br><u>112.8</u><br>Chan 75 | APP CRS<br>296° | Rwy Ldg 8501<br>TDZE 73<br>Apt Elev 73 |
|---------------------------------------|-----------------|----------------------------------------|


VOR Y or TACAN Y RWY 30  
KING SALMON (AKN)(PAKN)

DME required.


**MISSED APPROACH:** Climbing left turn to 3000 on heading 240° and on AKN VORTAC R-210 to OLLER/15 DME and hold.

**T** When local altimeter setting not received, use WSN/PFWS altimeter setting and increase all MDAs 40 feet and S-30 visibility Cat C/D/E  $\frac{1}{4}$  SM.

|               |                                 |                                   |                  |                  |                      |
|---------------|---------------------------------|-----------------------------------|------------------|------------------|----------------------|
| ATIS<br>128.8 | ANCHORAGE CENTER<br>124.8 354.0 | KING SALMON TOWER★<br>118.3 279.5 | GND CON<br>121.9 | UNICOM<br>122.95 | CTAF<br>121.9 352.05 |
|---------------|---------------------------------|-----------------------------------|------------------|------------------|----------------------|

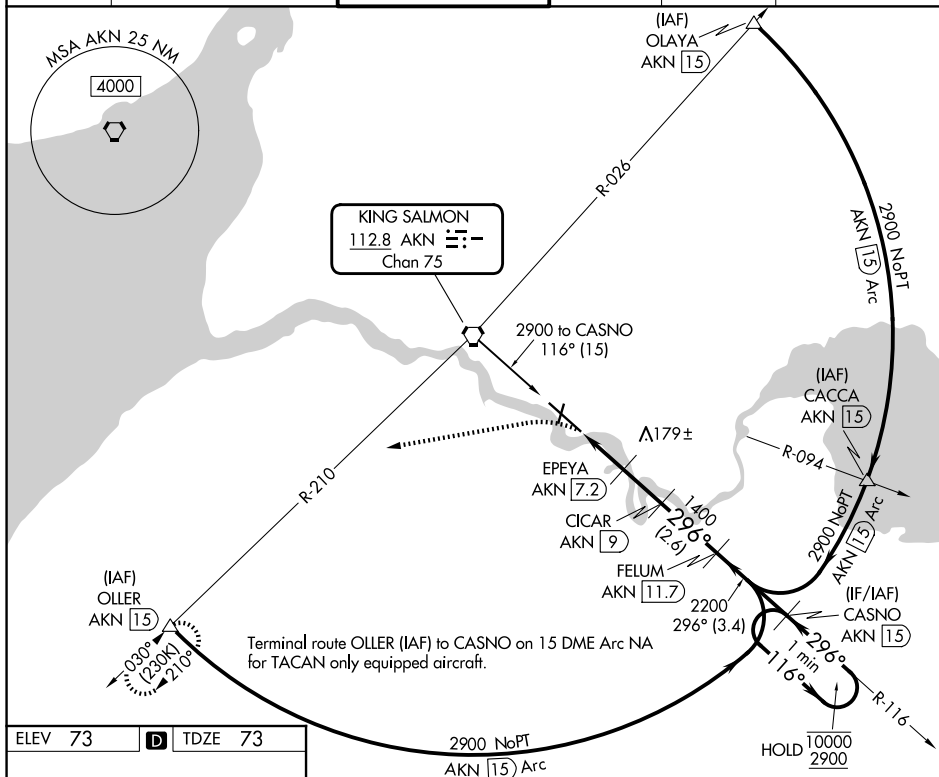

|         |          |         |
|---------|----------|---------|
| ELEV 73 | <b>D</b> | TDZE 73 |
|---------|----------|---------|

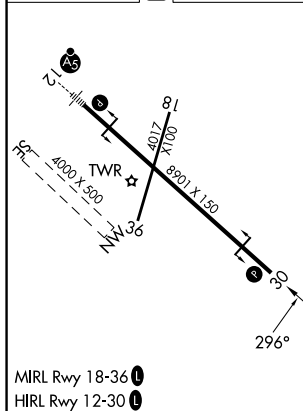

|                               |                   |            |                                                        |  |   |   |   |
|-------------------------------|-------------------|------------|--------------------------------------------------------|--|---|---|---|
| 3000<br>hdg<br>240°           | AKN<br>R-210      | OLLER<br>△ |                                                        |  |   |   |   |
| One Minute<br>Holding Pattern |                   |            |                                                        |  |   |   |   |
| CATEGORY                      | A                 |            | B                                                      |  | C | D | E |
| S-30                          | 480-1 407 (500-1) |            | 480-1½ 407 (500-1½)                                    |  |   |   |   |
| CIRCLING                      | 580-1 507 (600-1) |            | 580-1½ 900-2¾<br>507 (600-1½) 827 (900-2¾) 887 (900-3) |  |   |   |   |