


LOC/DME I-ANC 111.3 Chan 50	APP CRS 074°	Rwy Ldg 12400 TDZE 132 Apt Elev 151	7R 10600 128 151	7L
---	------------------------	---	--	----

ILS or LOC RWY 7R
TED STEVENS ANCHORAGE INTL (ANC) (PANC)

DME required. ▼ ▲ ❄ -21°C For inop ALS, increase S-ILS 7R Cat E visibility to RVR 4000, S-LOC 7R Cat E visibility to RVR 6000, and Sidestep Rwy 7L Cat E visibility to 2 SM. Rwy 7L threshold 6140 feet east of Rwy 7R threshold.	ALS-2 Rwy 7R A	MALSR Rwy 7L AS	MISSED APPROACH: Climb to 780 then climbing right turn to 3000 on heading 230° and on TED VOR/DME R-210 to JUKEP/TED 15 DME and hold. (TACAN aircraft climb to 780 then climbing right turn to 3000 on heading 230° and EDF TACAN R-210 to JUKEP/EDF 22.6 DME and hold).
---	-------------------	--------------------	--

D-ATIS 135.5	ANCHORAGE APP CON 118.6 290.5	ANCHORAGE TOWER 118.3 257.8	GND CON 121.9 338.25	CLNC DEL 119.4 323.1
------------------------	---	---------------------------------------	--------------------------------	--------------------------------

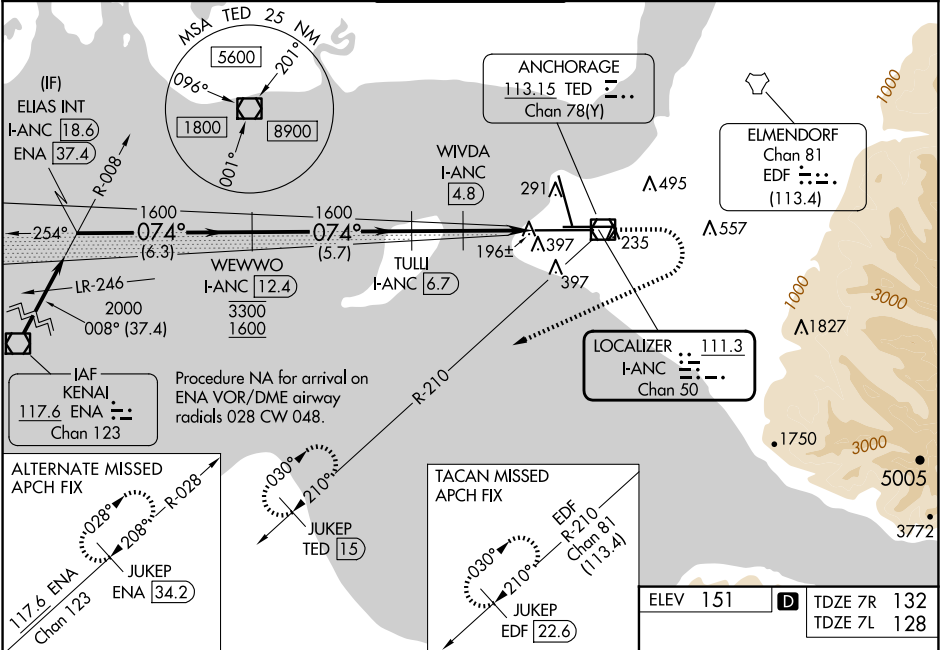

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).					
ELIAS INT I-ANC 18.6	WEWWO I-ANC 12.4	TULLI I-ANC 6.7	WIVDA I-ANC 4.8	I-ANC 3.2	I-ANC 2.2
2000	3300	1600	1000	780	3000
GS 3.00° TCH 55	6.3 NM	5.7 NM	1.8 NM	1.6 NM	1 NM
CATEGORY	A	B	C	D	E
S-ILS 7R	332/18 200 (200-½)				
S-LOC 7R	520/24	388 (400-½)	520/35 388 (400-¾)		
SIDESTEP 7L	520/55 392 (400-1)		520-1½ 392 (400-1½)		
CIRCLING	700-1 549 (600-1)	800-1¾ 649 (700-1¾)	920-2½ 769 (800-2½)	920-2¾ 769 (800-2¾)	
REIL Rwy 33 TDZ/CL Rwy 7L and 7R HIRL all Rwy					

Diagram illustrating the approach path and glide slope for Rwy 33. The path starts at 2000 feet and descends at 074° to 1600 feet, then continues to 1000 feet. The path is marked with distances: 6.3 NM, 5.7 NM, 1.8 NM, 1.6 NM, and 1 NM. The path is also marked with altitudes: 2000, 3300, 1600, 1000, 780, and 3000. The path is labeled with "ELIAS INT I-ANC 18.6", "WEWWO I-ANC 12.4", "TULLI I-ANC 6.7", "WIVDA I-ANC 4.8", "I-ANC 3.2", and "I-ANC 2.2". The path is also labeled with "GS 3.00° TCH 55".

Diagram illustrating the approach path and glide slope for Rwy 33. The path starts at 2000 feet and descends at 074° to 1600 feet, then continues to 1000 feet. The path is marked with distances: 6.3 NM, 5.7 NM, 1.8 NM, 1.6 NM, and 1 NM. The path is also marked with altitudes: 2000, 3300, 1600, 1000, 780, and 3000. The path is labeled with "ELIAS INT I-ANC 18.6", "WEWWO I-ANC 12.4", "TULLI I-ANC 6.7", "WIVDA I-ANC 4.8", "I-ANC 3.2", and "I-ANC 2.2". The path is also labeled with "GS 3.00° TCH 55".