WAAS CH **90115** **W15A**	APP CRS **149°**	Rwy Ldg **10000** TDZE **151** Apt Elev **151**

RNAV (GPS) RWY 15

TED STEVENS ANCHORAGE INTL (ANC) (PANC)

RNP APCH.

T A -21°C Inop table does not apply to LPV, LNAV/VNAV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1⅜ SM.

MALSF

MISSED APPROACH: Climb to 3000 direct ZUXAN and on track 229° to JUKEP and hold.

D-ATIS	ANCHORAGE APP CON	ANCHORAGE TOWER	GND CON	CLNC DEL
135.5	118.6 290.5	118.3 257.8	121.9 338.25	119.4 323.1

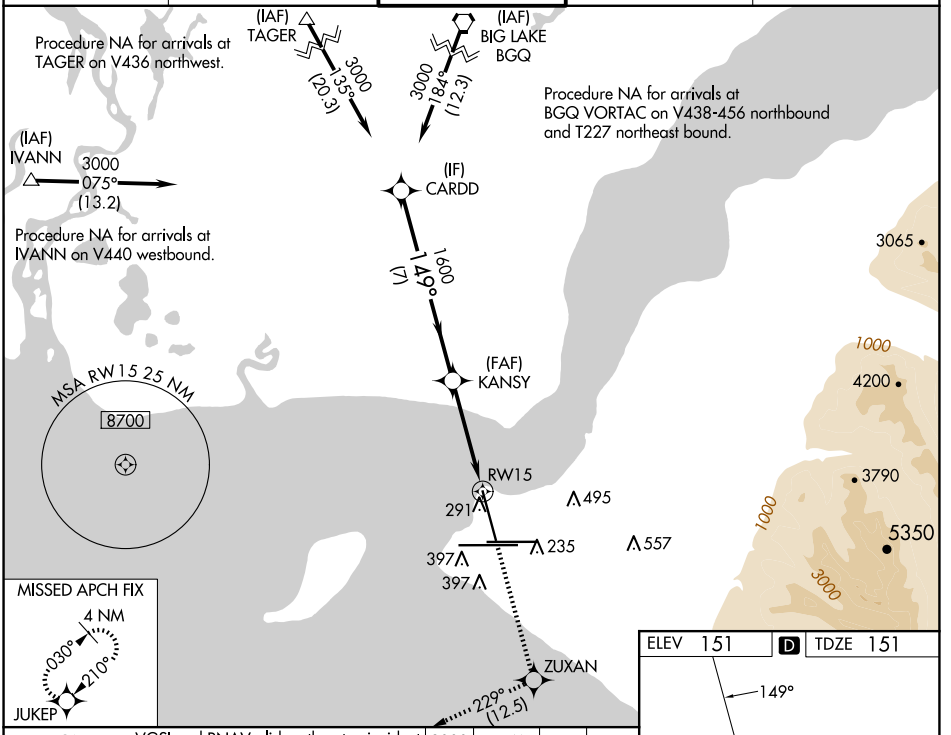

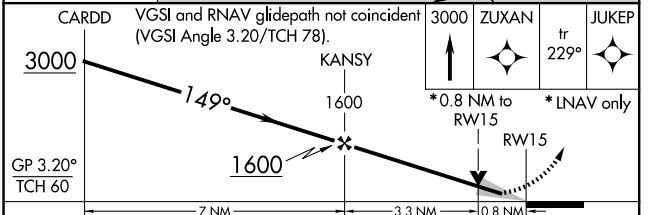

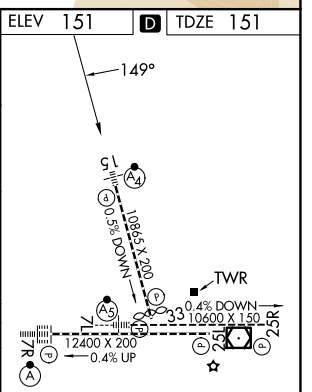

REIL Rwy 33
TDZ/CL Rwys 7L and 7R
HIRL all Rwys

CATEGORY	A	B	C	D
LPV DA	351/40	200 (200-¾)	401/40	250 (300-¾)
LNAV/VNAV DA	404/40	253 (300-¾)		
LNAV MDA	600/40	449 (500-¾)	600/60	449 (500-1¼)
C CIRCLING	700-1	549 (600-1)	800-1¾ 649 (700-1¾)	920-2½ 769 (800-2½)

AK, 22 JAN 2026 to 19 MAR 2026
AK, 22 JAN 2026 to 19 MAR 2026