

LOC/DME I-GUM 110.3 Chan 40	APP CRS 063°	Rwy Ldg 11014 TDZE 256 Apt Elev 305
---	------------------------	--

ILS or LOC RWY 6L
GUAM INTL (GUM)(PGUM)

DME or RADAR required.


T Circling NA southeast of Rwy 6R-24L. For inop ALS, increase S-ILS
A 6L all Cats visibility to 1 SM; MOBKE fix minimums (DME required):
For inop ALS, increase S-LOC 6L Cats C and D visibility to 2½ SM.
Inop table does not apply to S-LOC 6L Cats C and D.

MALSR




MISSED APPROACH: Climb to 2100 then climbing right turn to 3000 direct UNZ VORTAC then on I-GUM localizer SW course to OBALE/I-GUM 14.3 DME/RADAR and hold.


ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4
---------------	---------------------------	----------------------------	------------------------

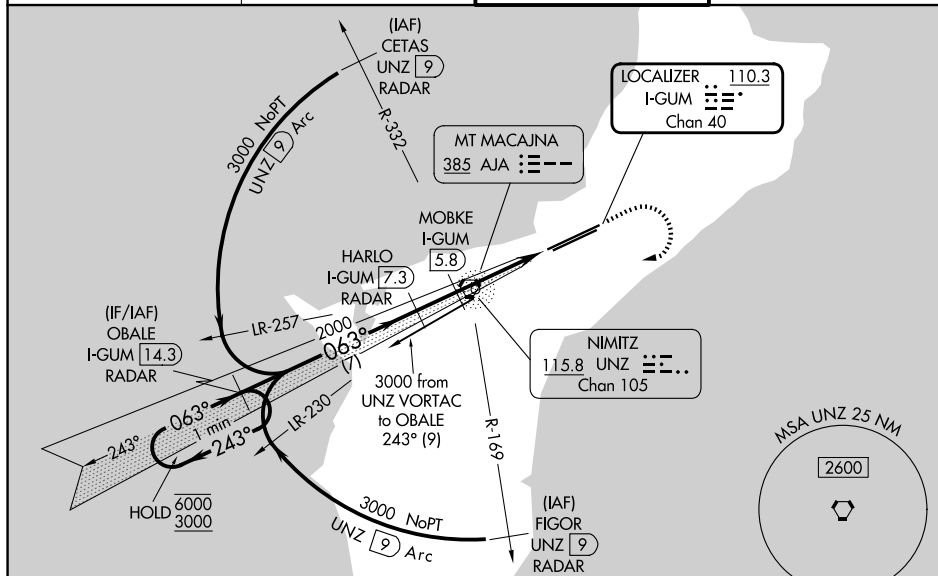

VGSI and ILS glidepath not coincident
(VGSI Angle 3.00/TCH 73).

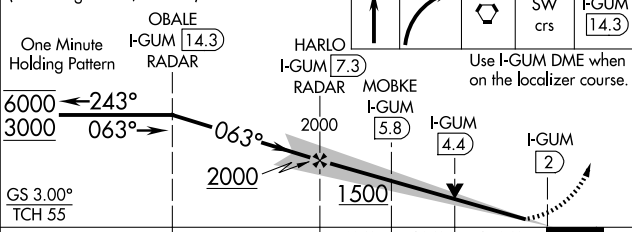

CATEGORY	A	B	C	D
S-ILS 6L	590-1/2 334 (300-1/2)			
S-LOC 6L	1500-3/4 1244 (1200-3/4)	1500-1 1244 (1200-1)	1500-3	1244 (1200-3)
CIRCLING	1500-1 1/4 1195 (1200-1 1/4)	1500-1 1/2 1195 (1200-1 1/2)	1500-3 1195 (1200-3)	NA
MOBKE FIX MINIMUMS (DME REQUIRED)				
S-LOC 6L	1100-3/4 844 (800-3/4)		1100-2 844 (800-2)	
CIRCLING	1100-1 795 (800-1)	1100-1 1/4 795 (800-1 1/4)	1100-2 1/2 795 (800-2 1/2)	NA

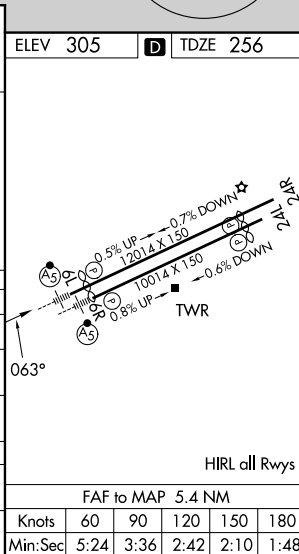

TAMUNING, GU
Amdt 4D 02OCT25

13°29'N-144°48'E

GUAM INTL (GUM)(PGUM)
ILS or LOC RWY 6L