

APP CRS
063°

Rwy Ldg
TDZE **258**
Apt Elev **305**

RNAV (RNP) Z RWY 6R
GUAM INTL (GUM)(PGUM)

RNP AR APCH - GPS.

▼

NA


For uncompensated Baro-VNAV systems, procedure NA below 19°C or above 48°C. Rwy 6R helicopter visibility reduction below ¾ SM NA. For inop ALS increase RNP 0.30 all Cats visibility to 1 ½. Inop table does not apply to RNP 0.30 *.

MALSR

AS

MISSED APPROACH: Climb to 3000 on 063° track to CIBOL and hold.
*Missed approach requires minimum climb of 285 feet per NM to 1400.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4
----------------------	----------------------------------	-----------------------------------	-------------------------------

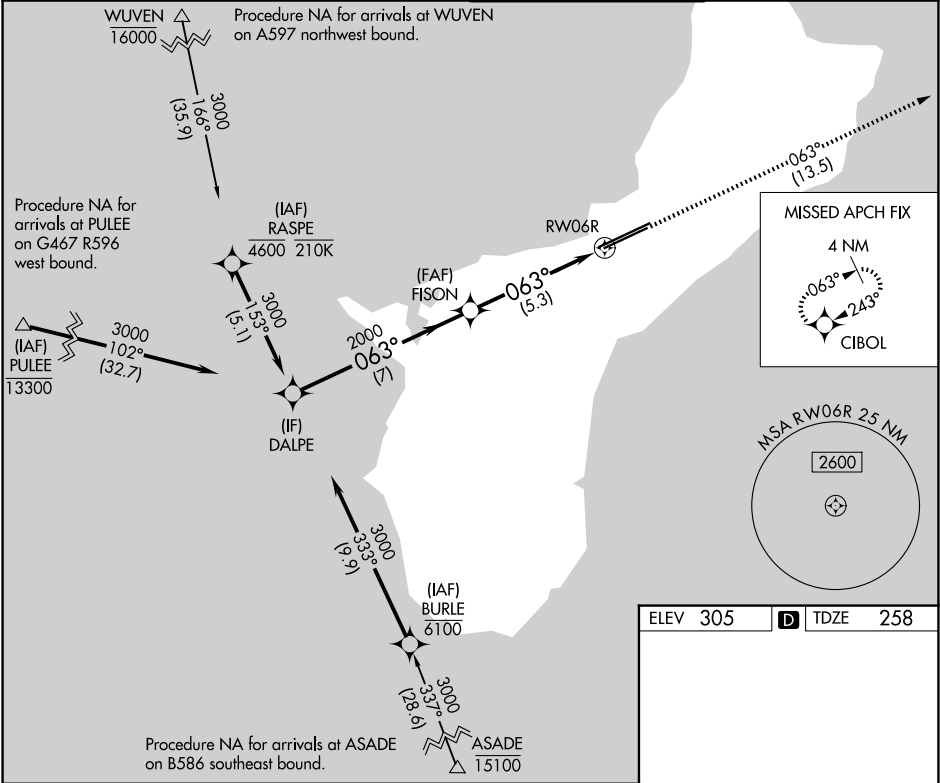

DALPE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).

3000

CIBOL

GP 3.00° TCH 55

063°

2000

FISON

063° Tr

7 NM

5.3 NM

GP 3.00° TCH 55

063°

2000

FISON

063° Tr

7 NM

5.3 NM

CATEGORY	A	B	C	D
RNP 0.30 DA*	511-¾ 253 (300-¾)			
RNP 0.30 DA	656-¾ 398 (400-¾)			

AUTHORIZATION REQUIRED

HIRL all Rwys

0.5% UP

0.7% DOWN

12014 X 150

0.8% UP

0.6% DOWN

10014 X 150

TWR

063°

243°