

WAAS CH 70507 W19A	APP CRS 193°	Rwy Ldg 6400 TDZE 120 Apt Elev 129
--	------------------------	---


RNAV (GPS) RWY 19R
BETHEL (BET) (PABE)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA.



MISSED APPROACH: Climb to 1700 then climbing right turn to 2000 direct ROLLR and hold

ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7
----------------------	--	---	-------------------------

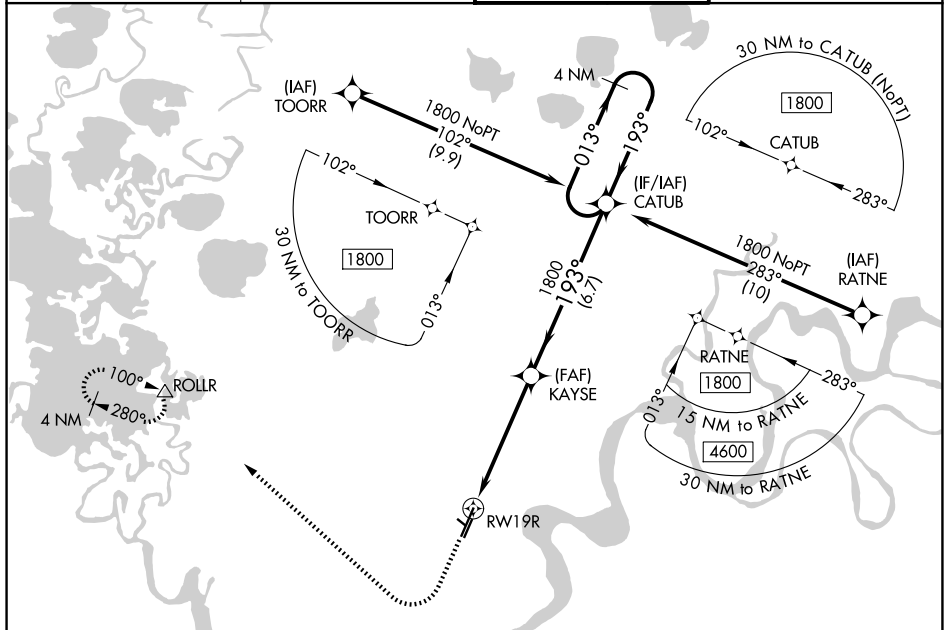

ELEV 129

TDZE 120

193°

36 L

0.4% UP

1858 X 75

30

8400 X 150

4000 X 75

76 L

1 L

1 R

REIL Rwy 1R and 19L

HIRL Rwy 1L-19R, 1R-19L and 12-30

TWR

1700	2000	ROLLR				
* LNAV only			1800 193° 013° 1800 193° GP 3.00° TCH 52			
CATEGORY	A	B	C	D		
LPV DA	320/24		200 (200-½)			
LNAV/VNAV DA	479/40		359 (400-¾)			
LNAV MDA	560/24 440 (500-½)		560/45 440 (500-¾)			
CIRCLING	560-1 431 (500-1)	600-1 471 (500-1)	600-1½ 471 (500-1½)	680-2 551 (600-2)		