


DME required.

Autopilot coupled approach NA below 1632.

MALSR

MISSED APPROACH: Climb to 2100 then climbing left turn to 4000 on heading 110° and RZC VORTAC R-048 to TEEUP/RZC VORTAC 12.6 DME and hold.

AWOS-3PT	RAZORBACK APP CON ★	ROGERS TOWER ★	GND CON	CLNC DEL	CLNC DEL
134.375	126.6 305.2	119.375 (CTAF) 0	118.0	121.75	121.75 (When twr closed)

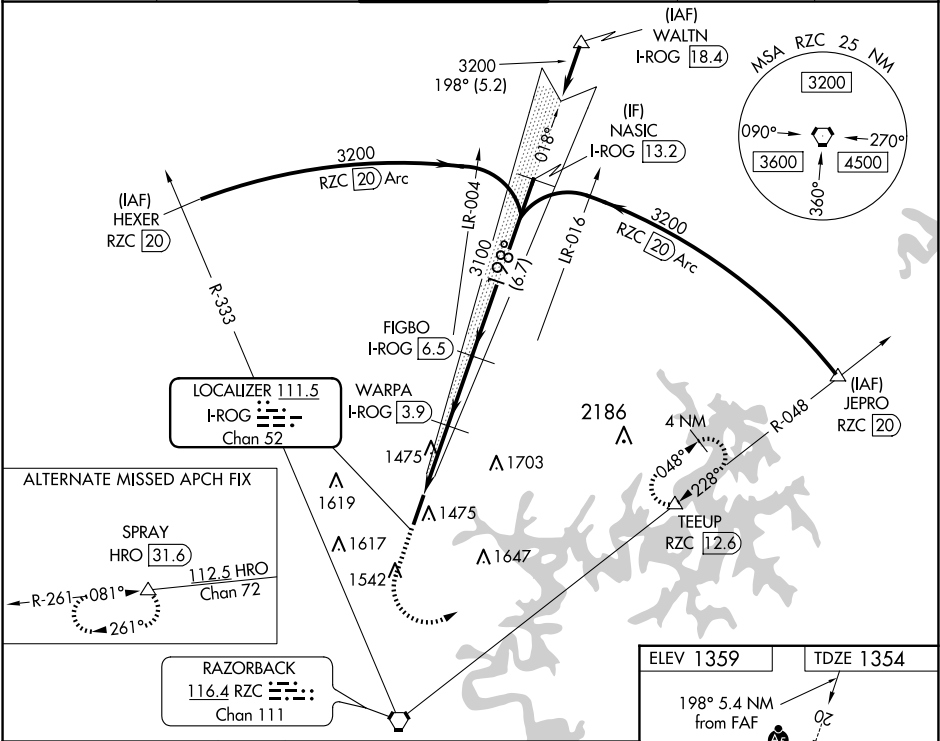

2100

4000

hdg 110°

RZC R-048

TEEUP

Use I-ROG DME when on LOC course.

FIGBO I-ROG 6.5

NASIC I-ROG 13.2

WARPA I-ROG 3.9

I-ROG 2.2

I-ROG 1.2

2240

3100

3200

198°

3100

GS 3.00° TCH 55

CATEGORY	A	B	C	D
S-ILS 20	1554-½ 200 (200-½)			
S-LOC 20	1740-½ 386 (400-½)		1740-⅝ 386 (400-⅝)	
CIRCLING	1840-1 481 (500-1)		2020-1¾ 661 (700-1¾)	2020-2 661 (700-2)

