


WAAS CH 40301 W35A	APP CRS 348°	Rwy Ldg 8002 TDZE 21 Apt Elev 24
--	------------------------	---


RNAV (GPS) RWY 35

ACADIANA RGNL (A.R.A)


RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM and LNAV Cats C/D visibility to 1 SM. Circling NA to Rwy 17W and 35W.		MALSR 	MISSED APPROACH: Climb to 440 then climbing right turn to 2000 direct LULEW and hold.	
ASOS 133.325	LAFAYETTE APP CON★ 121.1 268.7	ACADIANA TOWER★ 125.0 (CTAF) 239.3	GND CON 121.7	UNICOM 122.95

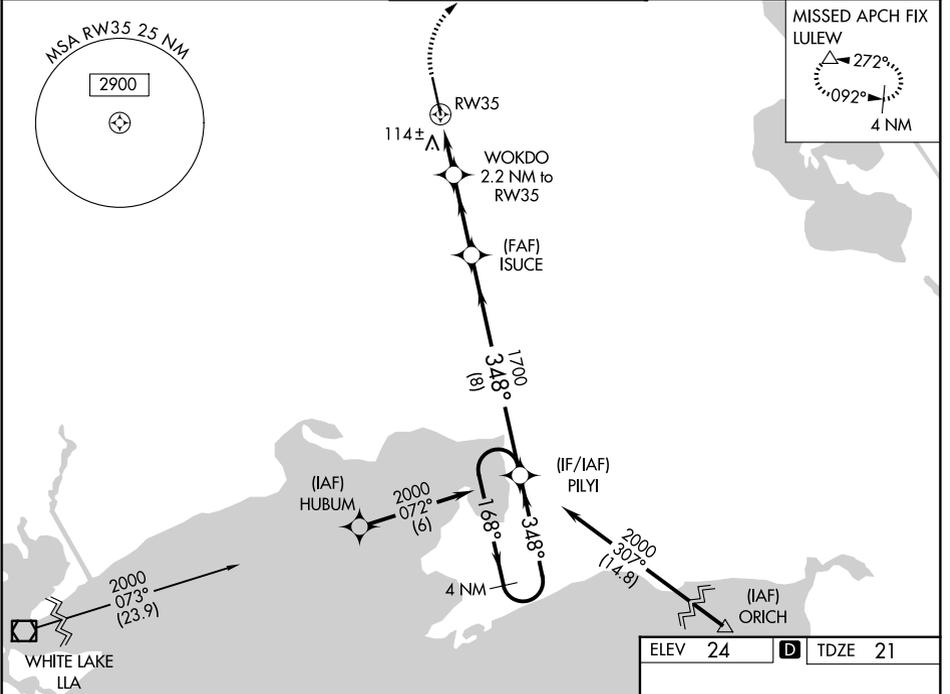

ELEV 24	D	TDZE 21
---------	----------	---------

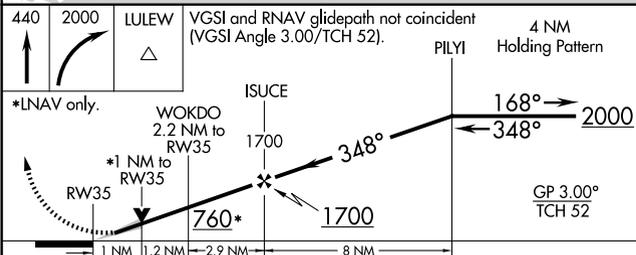

CATEGORY	A	B	C	D
LPV DA		221-½	200 (200-½)	
LNAV/DA		303-½	282 (300-½)	
LNAV MDA	380-½	359 (400-½)	380-¾	359 (400-¾)
CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)

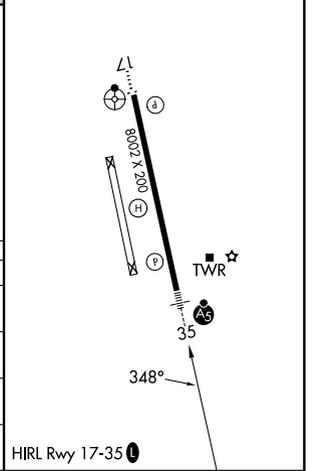

SC-4, 19 FEB 2026 to 19 MAR 2026

SC-4, 19 FEB 2026 to 19 MAR 2026