WAAS CH 97709 W09A	APP CRS 089°	Rwy ldg 5503 TDZE 385 Apt Elev 387

RNAV (GPS) RWY 9
HENDERSON CITY-COUNTY (EHR)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48° C. Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Evansville altimeter setting. When local altimeter setting not received, use Evansville altimeter setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C/D visibilities ¼ mile.

MISSED APPROACH: Climb to 2500 direct ONZIG and hold.

AWOS-3PT	EVANSVILLE APP CON ★	UNICOM
118.85	124.025 257.8	122.8 (CTAF) L

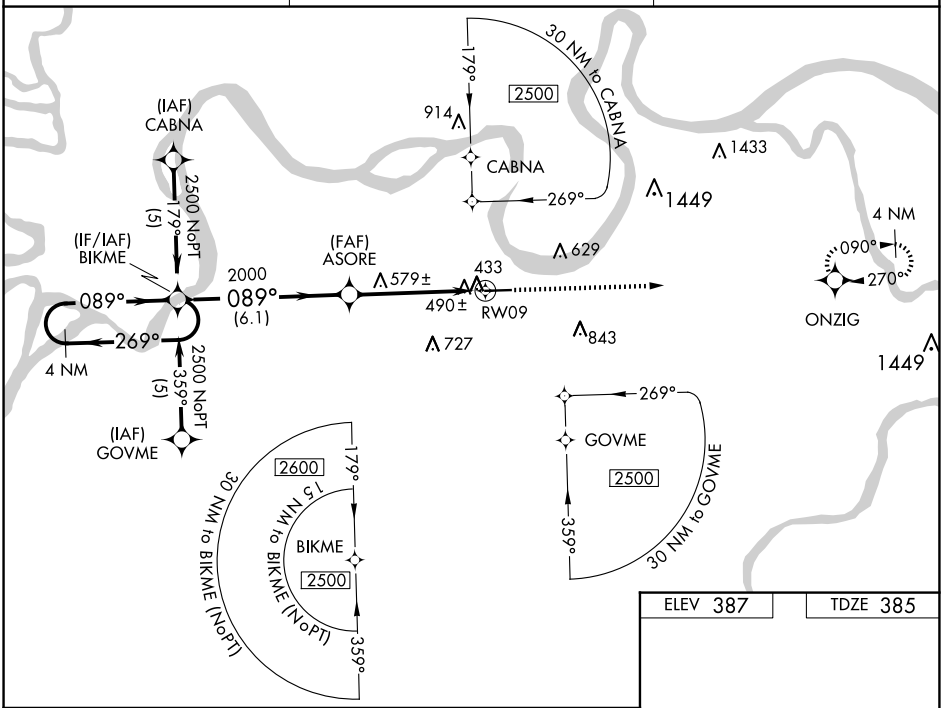

ELEV 387	TDZE 385

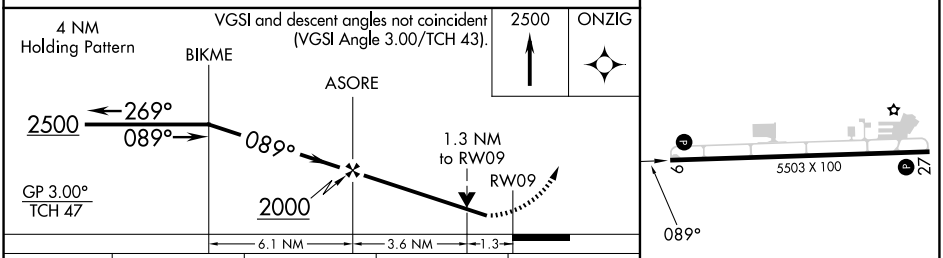

CATEGORY	A	B	C	D
LPV DA	694-1 309 (400-1)			
LNAV/VNAV DA	774-1¼ 389 (400-1¼)			
LNAV MDA	840-1 455 (500-1)		840-1⅜ 455 (500-1⅜)	840-1½ 455 (500-1½)

REIL Rwys 9 and 27 L
MIRL Rwy 9-27 L

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026