

VORTAC INL 114.95 Chan 96(Y)	APP CRS 134°	Rwy Ldg 7400 TDZE 1184 Apt Elev 1182
--	------------------------	---

VOR RWY 13

FALLS INTL/EINARSON FLD (INL)

⚠ Circling to Rwy 4-22 NA at night. VDP NA when using Baudette altimeter setting. When local altimeter setting not received, use Baudette altimeter setting and increase all MDAs 140 feet, and S-13 Cats A/B visibility ¼ mile, Cats C/D visibility ½ mile. Increase Circling Cat B visibility ¼ mile, Cat C and D ½ mile. For inop MALSR when using Baudette altimeter setting, increase S-13 Cat A visibility ¼ mile.


MALSR

MISSED APPROACH: Climb to 2900 then right turn direct INL VORTAC and hold.


ASOS
120.0

MINNEAPOLIS CENTER
120.9 377.1

UNICOM
122.8 (CTAF)

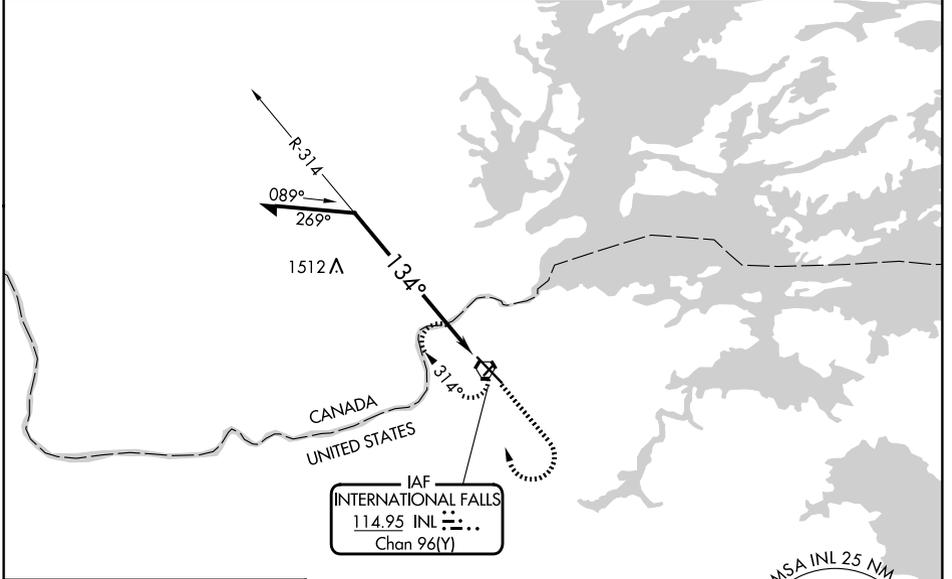

ELEV 1182 **D** TDZE 1184

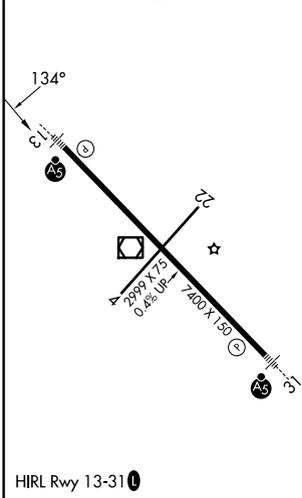

INL VORTAC

2900


314°

134°

INL 2.5

2 NM

MSA INL 25 NM
3200

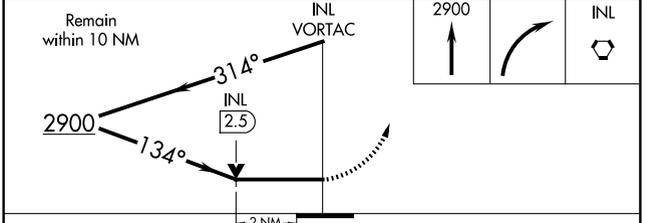

CATEGORY	A	B	C	D
S-13	1880-½ 696 (700-½)		1880-1½ 696 (700-1½)	1880-1¾ 696 (700-1¾)
CIRCLING	1880-1 698 (700-1)		1900-2 718 (800-2)	1900-2¼ 718 (800-2¼)

NC-1, 19 FEB 2026 to 19 MAR 2026

NC-1, 19 FEB 2026 to 19 MAR 2026