

WAAS CH <b>99499</b> <b>W33A</b>	APP CRS <b>327°</b>	Rwy Ldg TDZE Apt Elev	<b>5510</b> <b>1153</b> <b>1160</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 33

WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (T'BN)

**RNP APCH - GPS.**


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.  
 ▲ When local altimeter setting not received, use Rolla Nil altimeter setting and increase LPV DA to 1472 feet, increase LNAV/VNAV DA to 1521 feet and all MDAs 80 feet. Increase LNAV Cat C/D visibility to RVR 6000. Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats A/B. For inop ALS increase LNAV Cats C/D visibility to RVR 6000. VDP and Baro-VNAV NA when using Rolla Nil altimeter setting. Circling NA west of Rwy 15-33. Rwy 33 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats A/B when using Rolla Nil altimeter setting.

**MALS**


Ⓜ **3100**

**MISSED APPROACH:**  
Climb to 3100 direct PIMEW and hold.

D-ATIS <b>118.7 229.4</b>	KANSAS CITY CENTER <b>128.35 284.675</b>	FORNEY TOWER ★ <b>125.4 (CTAF) 0 268.7</b>	GND CON <b>123.75 256.8</b>
------------------------------	---	---	--------------------------------

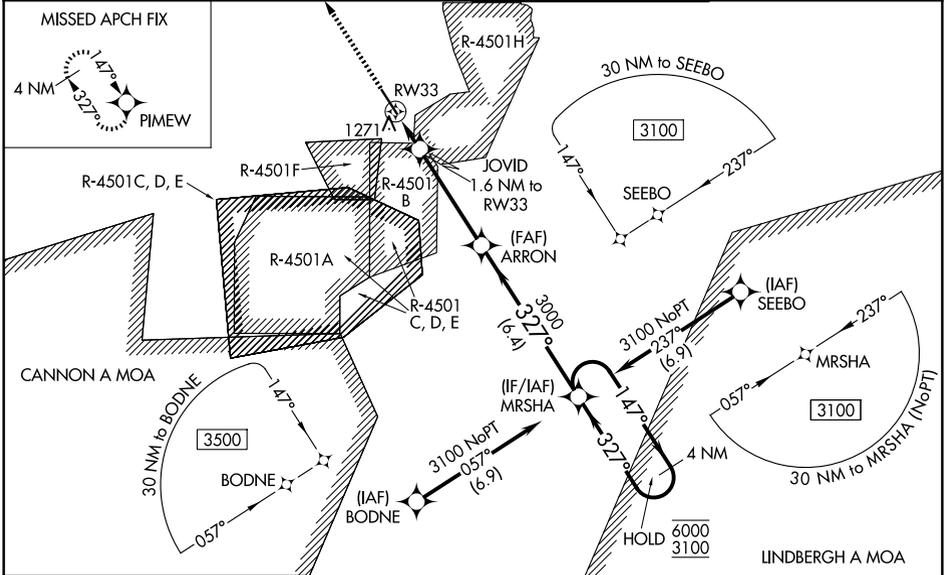

ELEV 1160	TDZE 1153
-----------	-----------

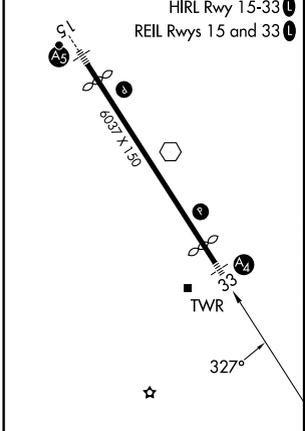

CATEGORY	3100 PIMEW	ARRON	MRSHA	4 NM Holding Pattern
	↑	JOVID 1.6 NM to RW33	3000	147° → 6000 ← 327° 3100
	↙	1.1 NM to RW33	3000	GP 3.00° TCH 36
	↖	1.1 NM	0.5 NM	4.1 NM
	↖	A	B	C
LPV DA	1403/50 250 (300-1)			
LNAV/VNAV DA	1452/50 299 (300-1)			
LNAV MDA	1540/50 387 (400-1)			
CIRCLING	1580-1 420 (500-1)	1660-1 500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)

NC-3, 19 FEB 2026 to 19 MAR 2026

NC-3, 19 FEB 2026 to 19 MAR 2026