

VOR/DME FCM 117.7 Chan 124	APP CRS 100°	Rwy Ldg TDZE 906 Apt Elev 906	5001
--	------------------------	--	-------------

VOR RWY 10R


FLYING CLOUD (FCM)

⚠ When local altimeter setting not received, use Minneapolis St-Paul/Wald-Chamberlain altimeter setting and increase all MDA 40 feet, HIVAT fix minimums: Increase S-10R Cat C visibility ¼ mile. For inoperative MALSRL, HIVAT fix minimums: Increase S-10R Cat D visibility to 1 ¼ mile. VDP NA when using Minneapolis St-Paul/Wald-Chamberlain altimeter setting. When Circling to Rwy 18, 36 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MALSRL


MISSED APPROACH: Climb to 1800 then climbing right turn to 2700 direct FCM VOR/DME and hold, continue climb-in-hold to 2700.

ATIS 124.9	MINNEAPOLIS APP CON 134.7 284.7	FLYING CLOUD TOWER* 119.15 (CTAF) 0	GND CON 121.7	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

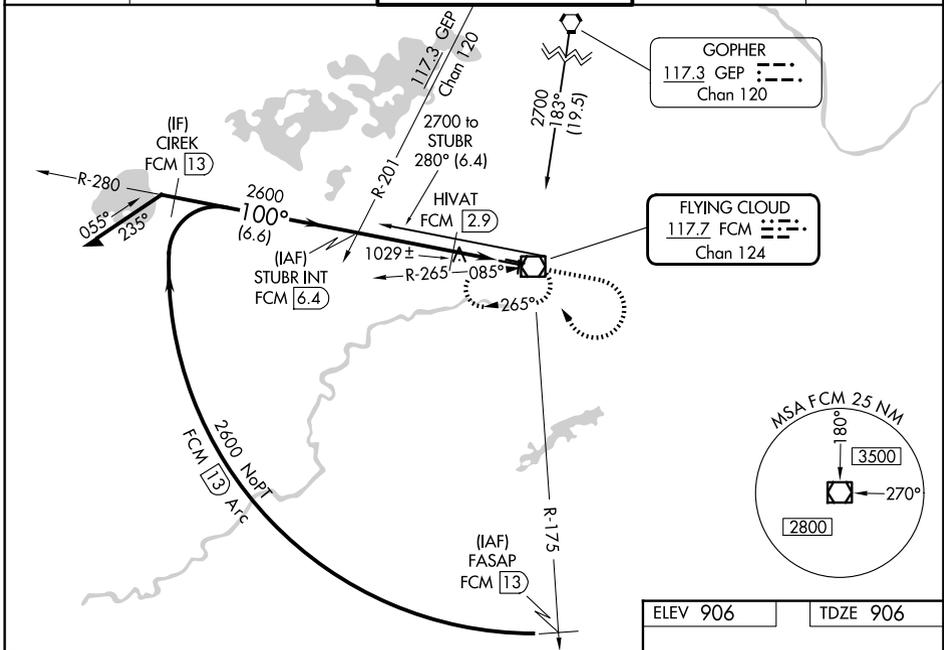


NC-1, 19 FEB 2026 to 19 MAR 2026

NC-1, 19 FEB 2026 to 19 MAR 2026

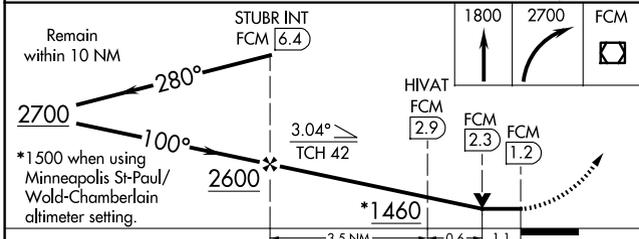

ELEV 906	TDZE 906
----------	----------



CATEGORY	A	B	C	D
S-10R	1460-½ 554 (600-½)		1460-1 554 (600-1)	1460-1¼ 554 (600-1¼)
CIRCLING	1460-1 554 (600-1)		1460-1½ 554 (600-1½)	1540-2 634 (700-2)
HIVAT FIX MINIMUMS (DME REQUIRED)				
S-10R	1280-½ 374 (400-½)			1280-1 374 (400-1)
CIRCLING	1320-1 414 (500-1)	1440-1 534 (600-1)	1440-1½ 534 (600-1½)	1540-2 634 (700-2)

HIRL Rwy 10R-28L
 REIL Rwys 10L and 28R
 REIL Rwys 18, 28L, and 36
 MIRL Rwy 10L-28R
 MIRL Rwy 18-36

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44