

APP CRS
141°


Rwy Idg **4001**
TDZE **9**
Apt Elev **10**

RNAV (GPS) RWY 14
MICHAEL J SMITH FLD (MRH)

DME/DME RNP-0.3 NA. ATC clearance required to penetrate R-5306A and R-5306C. When local altimeter setting not received, use Cherry Point MCAS (Cunningham Fld) altimeter setting and increase all MDA 40 feet; increase LNAV Cats C and D visibility ½ mile. Straight-in Rwy 14 NA at night, Circling Rwy 8, 14, 32 NA at night. Rwy 8, 14, 32 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 2300 direct
LAVTE and hold.

ASOS 135.375	CHERRY POINT APP CON 132.575 299.6	CLNC DEL 125.65	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------	---------------------------------

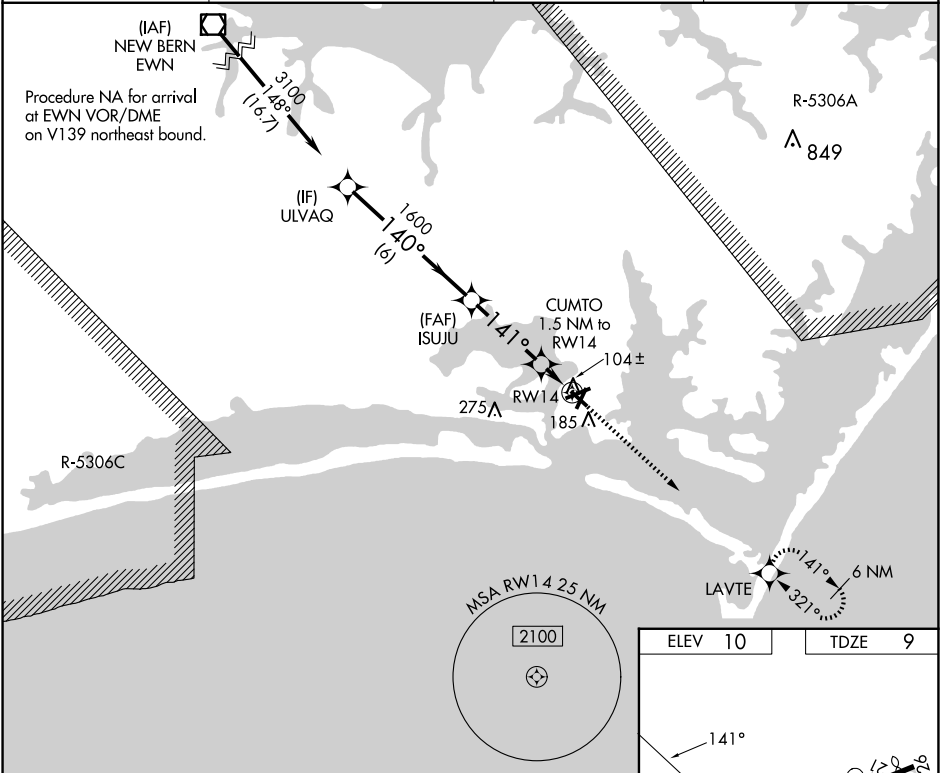

ULVAQ

3100

140°

ISUJU

1600

141°

3.00° TCH 40

CUMTO 1.5 NM to RW14

520

2300

LAVTE

6 NM

3.4 NM

1.5 NM

5004 X 100

4001 X 100

4192 X 130

3

32

141°

CATEGORY	A	B	C	D
LNAV MDA	360-1 351 (400-1)			
CIRCLING	540-1 530 (600-1)	580-1½ 570 (600-1½)	580-2 570 (600-2)	

REIL Rwy 8 and 26 0
MIRL Rwy 3-21 and 8-26 0

SE-2, 19 FEB 2026 to 19 MAR 2026

SE-2, 19 FEB 2026 to 19 MAR 2026