

FORT POLK, LOUISIANA

RNAV (GPS) RWY 34

WAAS CH 88848 W34A	APCH CRS 338°	Rwy Ildg TDZE 321 Arprt Elev 330
--	-------------------------	---

[USA]

MAKS AAF (FORT POLK) (KPOE)

RNP APCH - GPS

RADAR required for arrivals at CATVO.


- ▲ When ALS inop, increase vis to 1 mile.
- ** When ALS inop, increase vis to 7/8 mile.
- *** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/4 miles.
- When control tower is closed, increase vis to 1 mile.



MISSED APPROACH: Climb to 2000 direct BITAY and on track 340° to COCOS and hold.

ATIS 134.85 282.2	APP CON 123.7 261.3	TOWER★ 119.0 (CTAF) 257.75	GND CON 121.8 239.25	ASR/PAR
-----------------------------	-------------------------------	--------------------------------------	--------------------------------	---------


Rwy 34 helicopter visibility reduction below 3/4 mile not authorized.
 For uncompensated Baro-VNAV systems, LNAV/VNAV not authorized below -15°C or above 54°C.

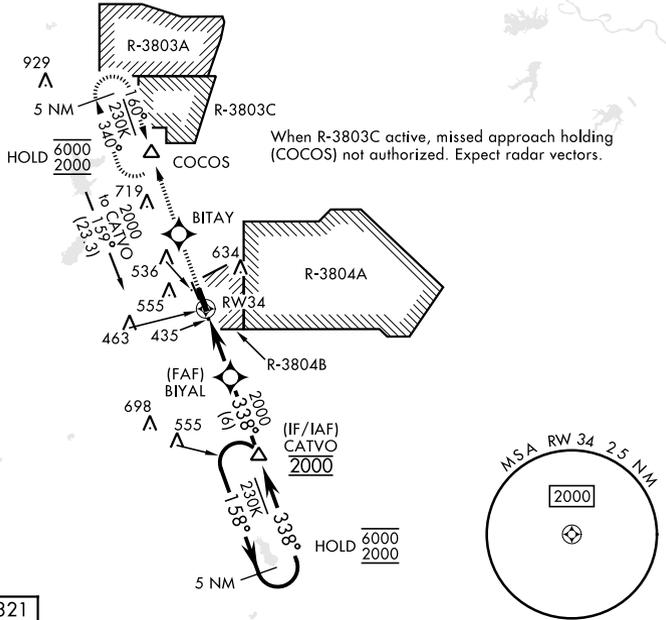

SC-4, 19 FEB 2026 to 19 MAR 2026

SC-4, 19 FEB 2026 to 19 MAR 2026

ELEV 330	TDZE 321
----------	----------

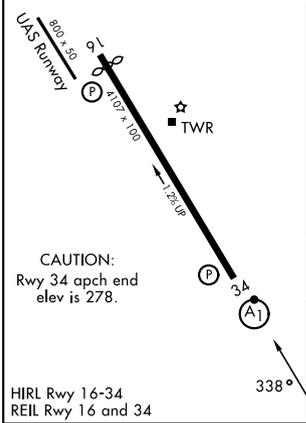

2000	BITAY	COCOS	5 NM Holding Pattern	
1.4 NM to RW34		BIYAL	CATVO	GP 3.00° TCH 45
5.3 NM		2000	158°	6000
			338°	2000
				2000
CATEGORY	A	B	C	D
LPV DA *	668-3/4		347	(400-3/4)
LNAV/VNAV DA**	594-3/4 273 (300-3/4)	605-3/4 284 (300-3/4)	613-3/4 292 (300-3/4)	624-3/4 303 (300-3/4)
LNAV MDA***	760-3/4		439	(500-3/4)
CIRCLING	880-1 550 (600-1)		880-1 1/2 550 (600-1 1/2)	940-2 610 (700-2)

FORT POLK, LOUISIANA
Amdt 3 15MAY25

31° 03'N-93° 11'W

MAKS AAF (FORT POLK) (KPOE)

RNAV (GPS) RWY 34