

| | | | |
|--|------------------------|---|-------------|
| WAAS CH 53618 W10A | APP CRS 097° | Rwy Ldg TDZE 756 Apt Elev 759 | 4750 |
|--|------------------------|---|-------------|


RNAV (GPS) RWY 10

DUPAGE (DPA)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Aurora altimeter setting: increase LPV DA to 993 feet and LNAV/VNAV DA to 1281; increase all MDA 40 feet and visibility LNAV Cat D and Circling Cat C/D ¼ SM. VDP and Baro-VNAV NA when using Aurora altimeter setting. Circling Rwy 15, 28, 33 NA at night.

MISSED APPROACH: Climb to 2600 direct PEPRE and right turn on track 204° to JOT VOR/DME and hold.

| | | | |
|------------------------|---------------------------------------|------------------------------------|-------------------------|
| ATIS 132.075 | CHICAGO APP CON 133.5 349.0 | DUPAGE TOWER 120.9 257.8 | GND CON 121.8 |
|------------------------|---------------------------------------|------------------------------------|-------------------------|

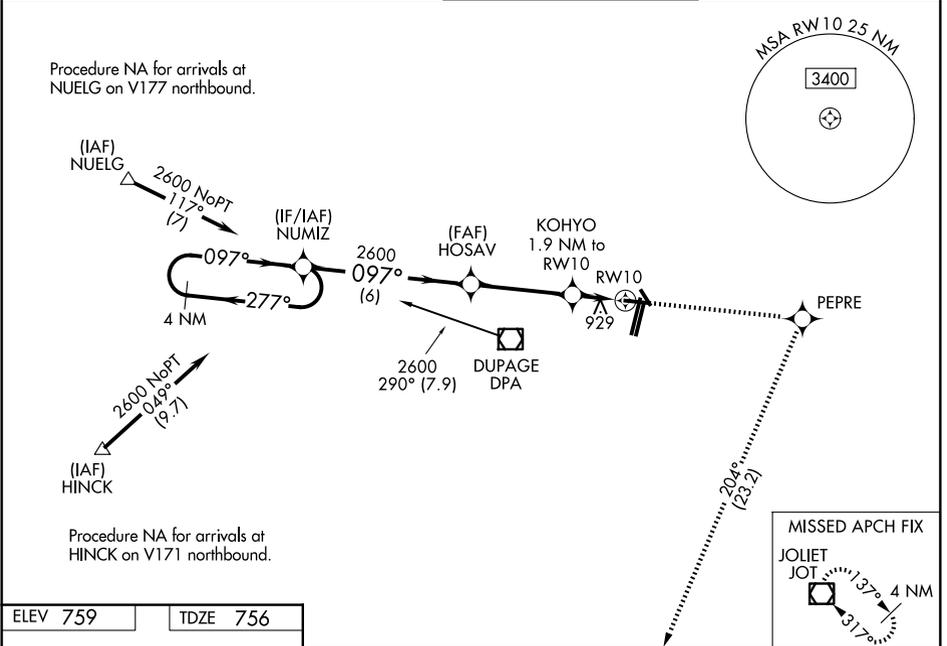

| | |
|----------|----------|
| ELEV 759 | TDZE 756 |
|----------|----------|

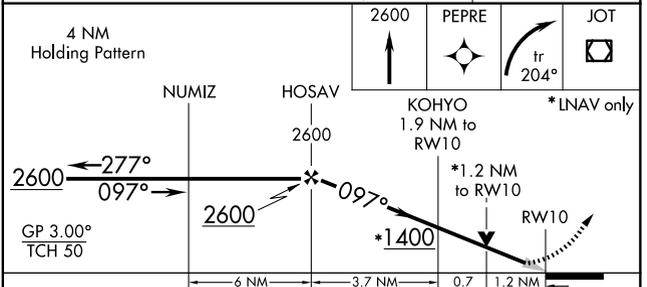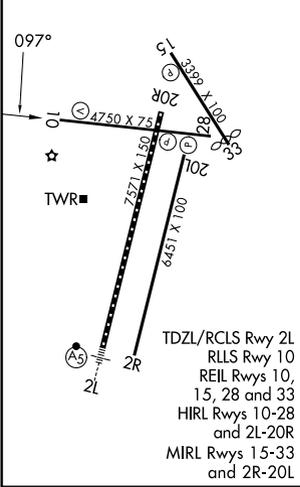

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-----------------------|-------------------------|
| LPV DA | | 956-¾ | 200 (200-¾) | |
| LNAV/VNAV DA | | 1244-1¾ | 488 (500-1¾) | |
| LNAV MDA | 1180-1 | 424 (500-1) | 1180-1¼ | 424 (500-1¼) |
| CIRCLING | 1260-1 501 (600-1) | 1360-1 601 (700-1) | 1460-2 701 (800-2) | 1460-2¼ 701 (800-2¼) |

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026