

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 58304 W36A | APP CRS 005° | Rwy Ldg TDZE Apt Elev | 5264 759 777 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 36


AUBURN UNIVERSITY RGNL (AUO)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Columbus altimeter setting.
⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Columbus altimeter setting: increase LPV DA to 1072 feet and visibility all Cats 1/2 SM; increase LNAV/VNAV DA to 1173 feet and visibility all Cats 3/8 SM; increase all MDA 120 feet and LNAV Cats C/D visibility 1/4 SM and Circling Cats C/D visibility 1/2 SM. For inop ALS, increase LNAV/VNAV Cat D visibility 1/4 SM and LNAV Cat D visibility 1/8 SM. For inop ALS, when using Columbus altimeter setting, increase LPV all Cats visibility to 1 1/8 SM, LNAV/VNAV all Cats visibility to 1 1/2 SM, and LNAV all Cats visibility to 1 3/8 SM.


MALSF

MISSED APPROACH:
Climb to 3000 direct RIVME and hold.

| | | | | |
|----------------------------|---|--|-----------------------------|------------------------|
| AWOS-3PT 132.575 | ATLANTA APP CON ★ 125.5 323.1 | AUBURN TOWER ★ 123.875 (CTAF) 0 | GND CON ★ 121.625 | UNICOM 123.0 |
|----------------------------|---|--|-----------------------------|------------------------|

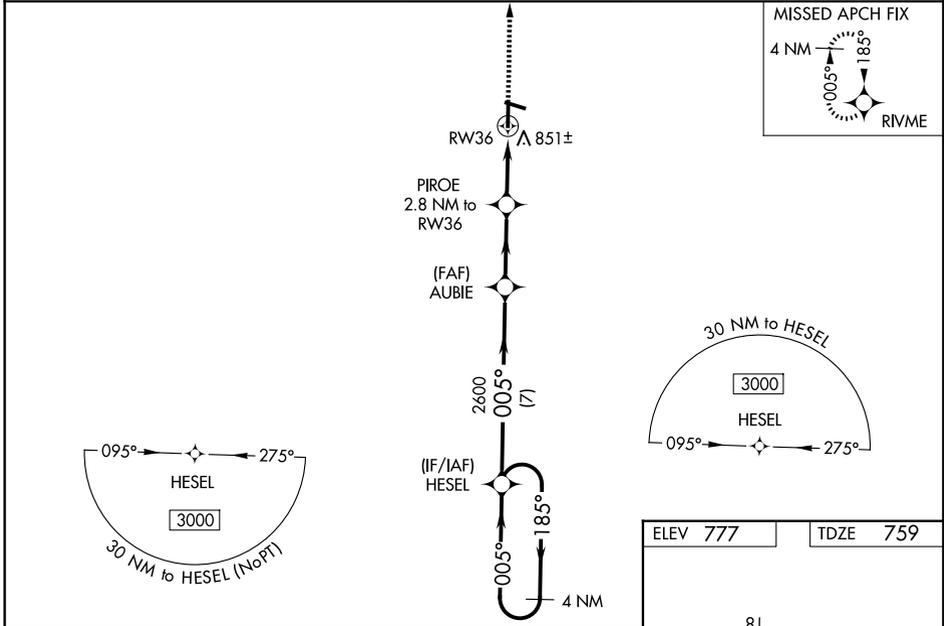

| | | | | |
|--------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
| CATEGORY | A | B | C | D |
| | | | | |
| LPV DA | | 959-3/4 | 200 (200-3/4) | |
| LNAV/VNAV DA | | 1060-7/8 | 301 (300-7/8) | |
| LNAV MDA | 1120-3/4 | 361 (400-3/4) | 1120-7/8 | 361 (400-7/8) |
| CIRCLING | 1280-1 503 (600-1) | 1360-1 583 (600-1) | 1380-1 3/4 603 (700-1 3/4) | 1480-2 1/4 703 (800-2 1/4) |

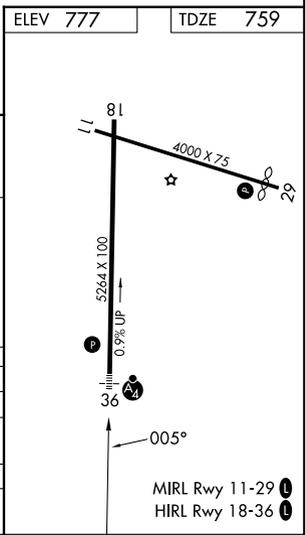

SE-4, 19 FEB 2026 to 19 MAR 2026

SE-4, 19 FEB 2026 to 19 MAR 2026