

| | | | |
|--|------------------------|---|-------------|
| WAAS CH 61215 W05A | APP CRS 050° | Rwy Idg TDZE 181 Apt Elev 182 | 5501 |
|--|------------------------|---|-------------|

RNAV (GPS) RWY 5

SUMTER (SMS)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Procedure NA when R-6002A is active. Circling NA to Rwy 14-32. When local altimeter setting not received, use Camden altimeter setting and increase all DA 65 feet and all MDA 80 feet and LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C/D, and Circling Cats C/D visibilities ¼ mile. VDP and Baro/VNAV NA when using Camden altimeter setting.

MISSED APPROACH: Climb to 2400 direct GAUGH and hold.


AWOS-3
118.075

SHAW APP CON*
125.4

UNICOM
122.7 (CTAF)

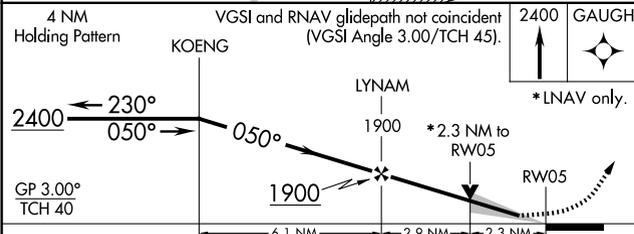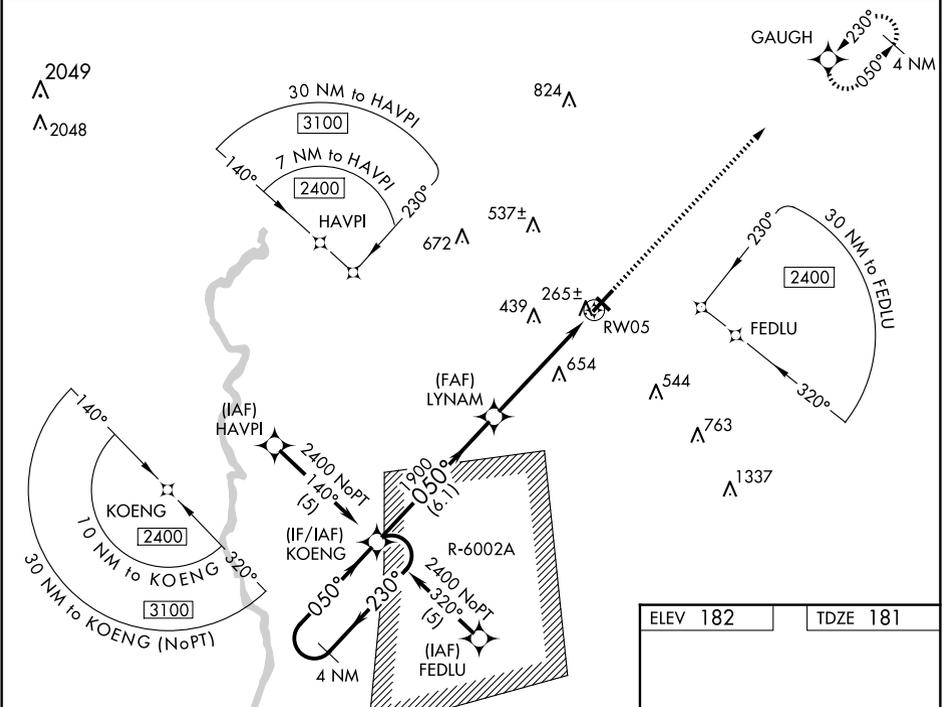

| CATEGORY | A | B | C | D |
|-------------------|----------------------|------------------------------|-------------------------------|-------------------------------|
| LPV DA | | 381-3/4 | 200 (200-3/4) | |
| LNAV/VNAV DA | | 535-1 1/4 | 354 (400-1 1/4) | |
| LNAV MDA | 940-1 759 (800-1) | 940-1 1/4 759 (800-1 1/4) | 940-2 1/4 759 (800-2 1/4) | 940-2 1/2 759 (800-2 1/2) |
| C CIRCLING | 940-1 758 (800-1) | 940-1 1/4 758 (800-1 1/4) | 1000-2 1/2 818 (900-2 1/2) | 1000-2 3/4 818 (900-2 3/4) |

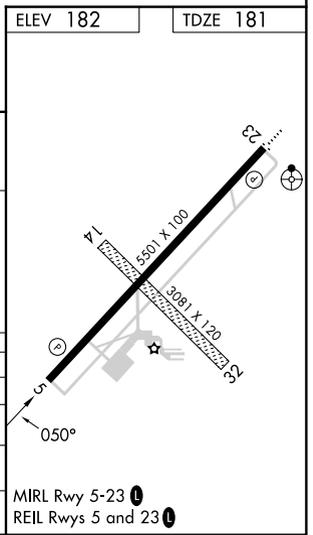

SE-2, 19 FEB 2026 to 19 MAR 2026

SE-2, 19 FEB 2026 to 19 MAR 2026