


WAAS CH 56600 W12A	APP CRS 116°	Rwy Idg TDZE Apt Elev	5500 632 632
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

BUTLER COUNTY RGNL/HOGAN FLD (HAO)

RNP APCH - GPS.			MISSED APPROACH: Climb to 3000 direct BRNIE and hold.
▼ Rwy 12 helicopter visibility reduction below $\frac{3}{4}$ SM NA. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 49°C.			
ASOS 121.425	CINCINNATI APP CON 121.0 254.25	CLNC DEL 126.25	UNICOM 123.05 (CTAF) 0

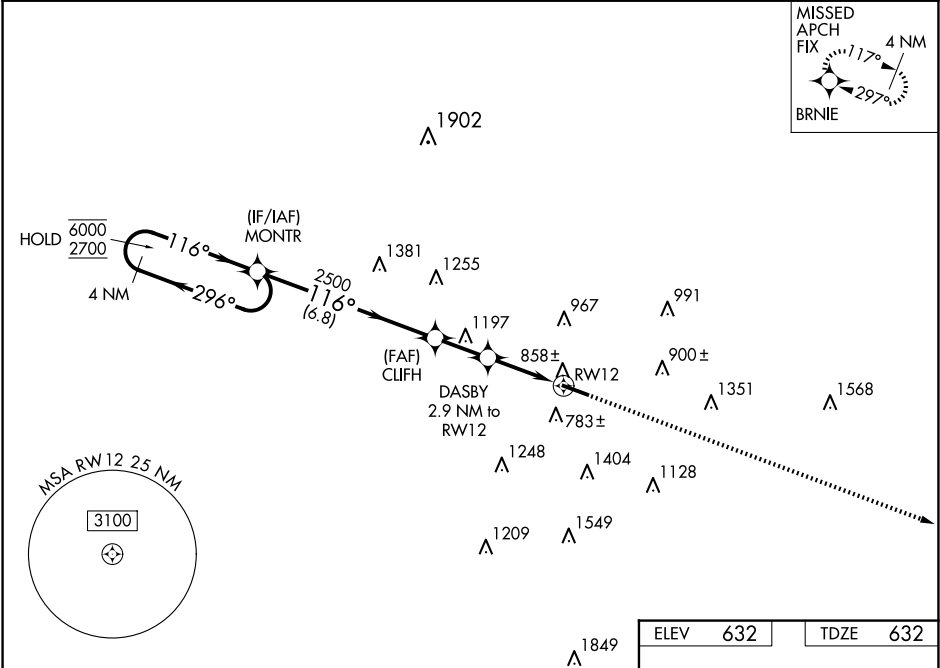

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 27).

MONTR

GP 3.50° TCH 40

CLIFH

DASBY

RWY 12

BRNIE

5500 X 100

CATEGORY	A	B	C	D
LPV DA	1020-1 $\frac{1}{8}$ 388 (400-1 $\frac{1}{8}$)			
LNAV/VNAV DA	1108-1 $\frac{3}{8}$ 476 (500-1 $\frac{3}{8}$)			
LNAV MDA	1160-1 528 (600-1)	1160-1 $\frac{1}{2}$ 528 (600-1 $\frac{1}{2}$)		
CIRCLING	1280-1 648 (700-1)	1300-1 $\frac{3}{4}$ 668 (700-1 $\frac{3}{4}$)	1760-3 1128 (1200-3)	

MRL Rwy 12-30 0
REIL Rwy 12 and 30 0