


WAAS CH 61300 W30A	APP CRS 296°	Rwy Idg TDZE 619 Apt Elev 632	5500
--	------------------------	---	-------------

RNAV (GPS) RWY 30


BUTLER COUNTY RGNL/HOGAN FLD (HAO)

RNP APCH - GPS.			MALS	MISSED APPROACH: Climb to 2700 direct MONTR and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Inop table does not apply to LPV.				

ASOS 121.425	CINCINNATI APP CON 121.0 254.25	CLNC DEL 126.25	UNICOM 123.05 (CTAF) 0
------------------------	---	---------------------------	----------------------------------

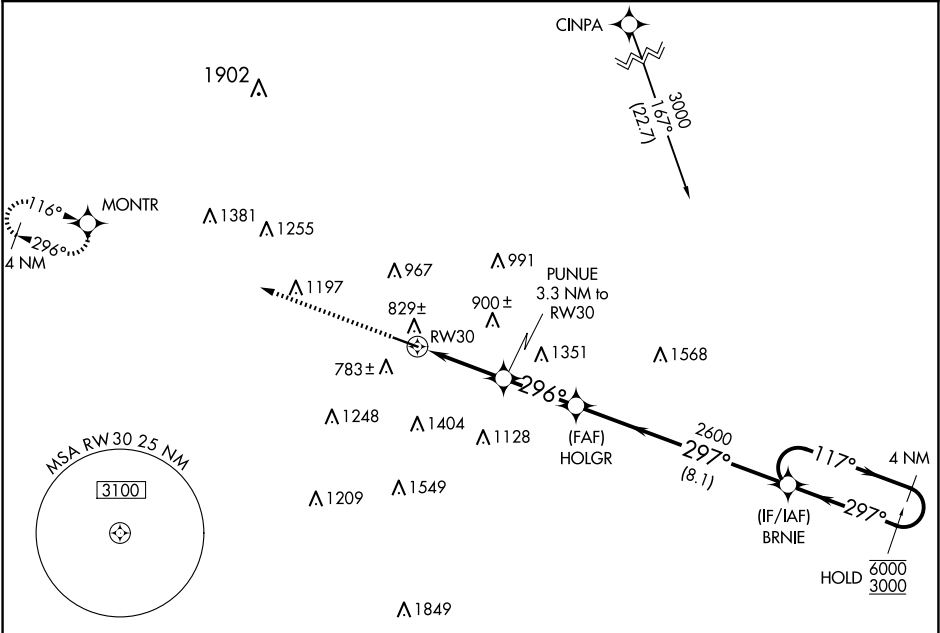

ELEV 632	TDZE 619
-----------------	-----------------

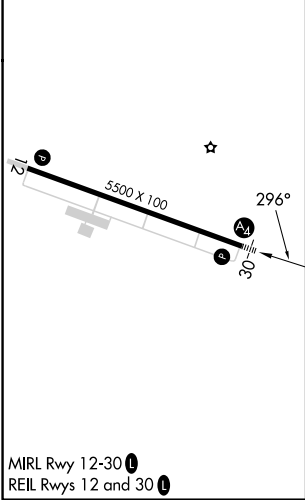

2700		MONTR				4 NM		Holding Pattern	
									
		RW30		PUNUE 3.3 NM to RW30		HOLGR 2600		BRNIE	
		1.3 NM to RW30		296°		297°		117°	
				1700		2600		6000	
								3000	
								GP 3.00° TCH 46	
		1.3		2 NM		2.8 NM		8.1 NM	
CATEGORY		A		B		C		D	
LPV DA				819-3/4		200 (200-3/4)			
LNAV/ VNAV DA				1080-1 1/8		461 (500-1 1/8)			
LNAV MDA		1080-3/4		461 (500-3/4)		1080-1 1/8		461 (500-1 1/8)	
CIRCLING		1280-1		648 (700-1)		1300-1 3/4 668 (700-1 3/4)		1760-3 1128 (1200-3)	