

WAAS CH 66023 W04A	APP CRS 040°	Rwy Ldg TDZE Apt Elev	4501 1944 1961
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4


HASTINGS MUNI (HSI)

RNP APCH - GPS.


⚠ Baro-VNAV and VDP NA when using GRI altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C. When local altimeter setting not received, use GRI altimeter setting and increase LPV DA to 2262 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 2414 feet and all visibilities 1/4 SM. Increase all MDAs 80 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4 SM.

MISSED APPROACH: Climb to 4000 direct DECNE and on track 082° to ROMAD and hold.

ASOS 120.525	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 1
------------------------	--	---------------------------------

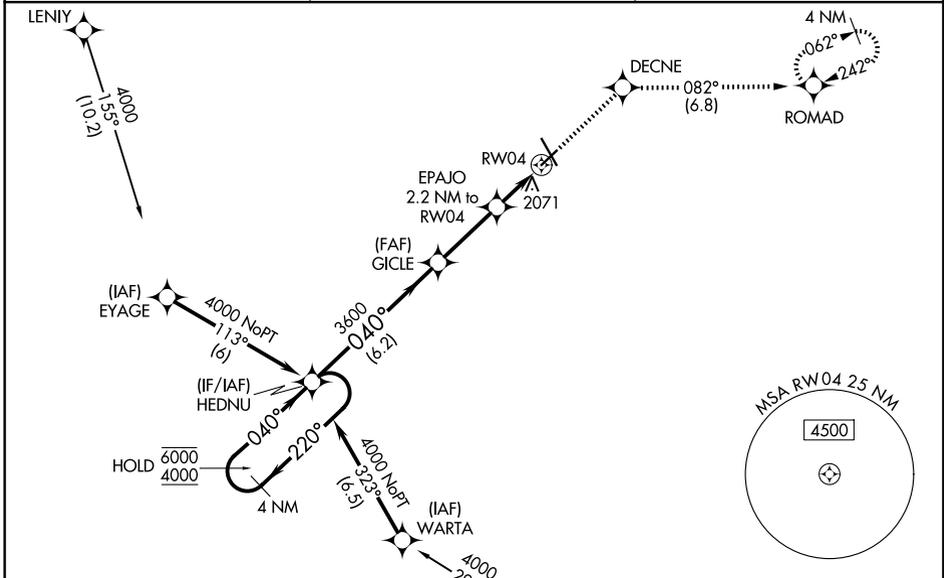

4 NM Holding Pattern		4000	DECNE	tr 082°	ROMAD
6000 ← 220°		3600		EPAJO 2.2 NM to RW04	
4000 → 040°		3600		1.3 NM to RW04	
GP 3.00°		2680		RW04	
TCH 40		6.2 NM		2.9 NM	
		1 NM		1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	2194-1 250 (300-1)				NA
LNAV/VNAV DA	2346-1 1/8 402 (400-1 1/8)				NA
LNAV MDA	2380-1	436 (500-1)	2380-1 1/4 436 (500-1 1/2)		NA
CIRCLING	2380-1 419 (500-1)	2540-1 579 (600-1)	2540-1 1/2 579 (600-1 1/2)		NA

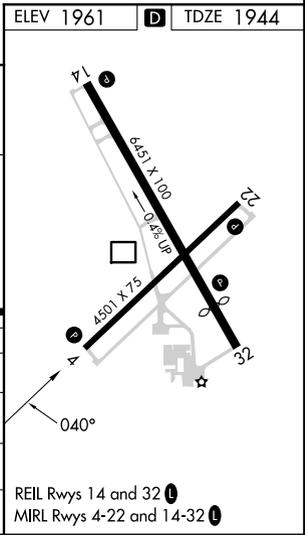

NC-2, 19 FEB 2026 to 19 MAR 2026

NC-2, 19 FEB 2026 to 19 MAR 2026