

WAAS CH 58300 W35A	APP CRS 347°	Rwy Idg 5999 TDZE 550 Apt Elev 550
--	------------------------	---

RNAV (GPS) RWY 35

OUTLAW FLD (CKV)

RNP APCH - GPS.

▼ Circling Rwy 5, 17, 23 NA at night. Baro-VNAV and VDP NA when using Campbell AAF (Fort Campbell) altimeter setting. Rwy 35 helicopter visibility reduction below 3/4 SM NA. Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Circling NA W of Rwy 17-35. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM. When local altimeter setting not received, use Campbell AAF (Fort Campbell) altimeter setting.

MALS






MISSED APPROACH:
Climb to 1000 then climbing right turn to 3000 direct GICEB and hold.

ASOS
134.575

CAMPBELL APP CON
134.35 307.025

UNICOM
122.8(CTAF) 0

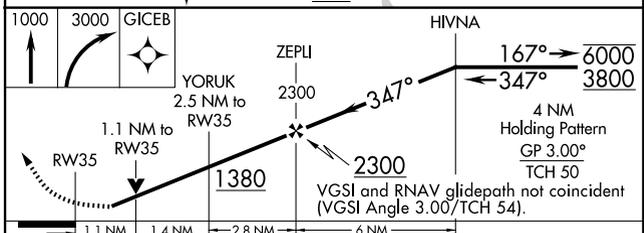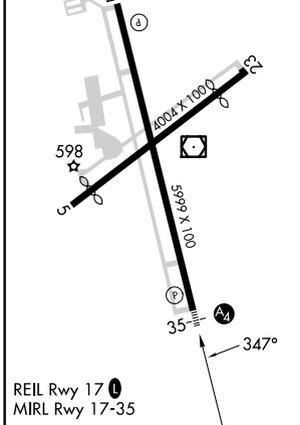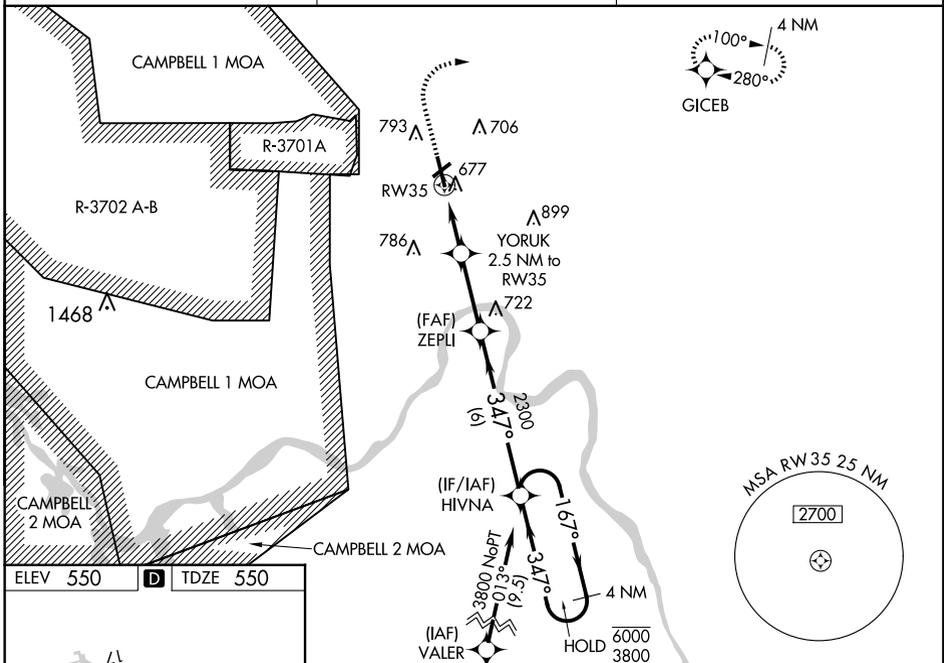

CATEGORY	A	B	C	D
LPV DA		805-3/4	255 (300-3/4)	
LNAV/VNAV DA		838-3/4	288 (300-3/4)	
LNAV MDA	940-3/4	390 (400-3/4)	940-7/8	390 (400-7/8)
C CIRCLING	1000-1 450 (500-1)	1020-1 470 (500-1)	1020-1 1/2 470 (500-1 1/2)	1200-2 650 (700-2)

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026