

|                           |                        |                             |   |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-CPS<br><b>109.1</b> | APP CRS<br><b>302°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>7002</b><br><b>411</b><br><b>413</b> |
|---------------------------|------------------------|-----------------------------|---|

# ILS or LOC RWY 30L


ST LOUIS DOWNTOWN (CPS)

**⚠** When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase DA to 674 feet, increase all MDAs 80 feet and visibility S-LOC 30L Cats C/D and Circling Cat C ¼ SM. For inop ALS when using St Louis Lambert Intl altimeter setting, increase S-ILS 30L visibility ¼ SM. Circling Rwy 5 NA at night.


**MALSR** 

**MISSED APPROACH:** Climb to 1400 then climbing left turn to 2200 on heading 080° and on I-CPS SE course (122°) to EBOPE INT and hold.

|                       |  |   |                         |                            |   |                         |
|-----------------------|--|---|-------------------------|----------------------------|---|-------------------------|
| ATIS<br><b>121.45</b> | ST LOUIS APP CON<br><b>123.7 371.875</b> | DOWNTOWN TOWER *<br><b>119.925 (CTAF) 0 379.3</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>118.275</b> | CLNC DEL<br><b>121.8</b><br>(When twr closed) | UNICOM<br><b>122.95</b> |
|-----------------------|--|---|-------------------------|----------------------------|---|-------------------------|

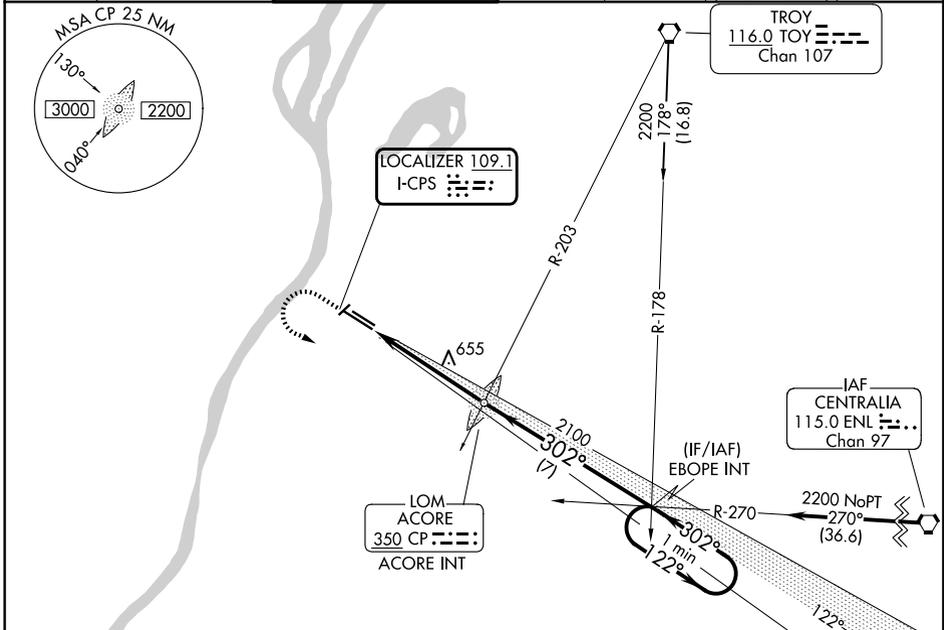


|          |          |          |
|----------|----------|----------|
| ELEV 413 | <b>D</b> | TDZE 411 |
|----------|----------|----------|



HIRL Rwy 12R-30L  
REIL Rwys 12L and 12R  
REIL Rwy 30R  
MIRL Rwys 5-23 and 12L-30R  
FAF to MAP 4.8 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 4:48 | 3:12 | 2:24 | 1:55 | 1:36 |

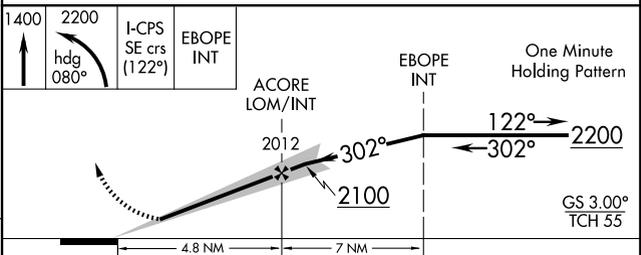

| CATEGORY  | A                    | B                     | C                       | D                      |
|-----------|----------------------|-----------------------|-------------------------|------------------------|
| S-ILS 30L |                      | 611-½                 | 200 (200-½)             |                        |
| S-LOC 30L | 960-½                | 549 (600-½)           | 960-1¼<br>549 (600-1¼)  | 960-1¼<br>549 (600-1¼) |
| CIRCLING  | 940-1<br>527 (600-1) | 1120-1<br>707 (800-1) | 1240-2½<br>827 (900-1½) | 1380-3<br>967 (1000-3) |

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026