

APP CRS	Rwy Ldg	7002
107°	TDZE	413
	Apt Elev	413

RNAV (GPS) RWY 12R


ST LOUIS DOWNTOWN (CPS)

RNP APCH - GPS.

▼ When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase LNAV Cats B/C/D and Circling Cat C visibility ¼ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below ¼ SM NA.


▲ MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.

ATIS 121.45	ST LOUIS APP CON 123.7 371.875	DOWNTOWN TOWER ★ 119.925 (CTAF) 0 379.3	GND CON 121.8	CLNC DEL 118.275	CLNC DEL 121.8 (When twr closed)	UNICOM 122.95
-----------------------	------------------------------------------	---------------------------------------------------	-------------------------	----------------------------	-----------------------------------------------	-------------------------

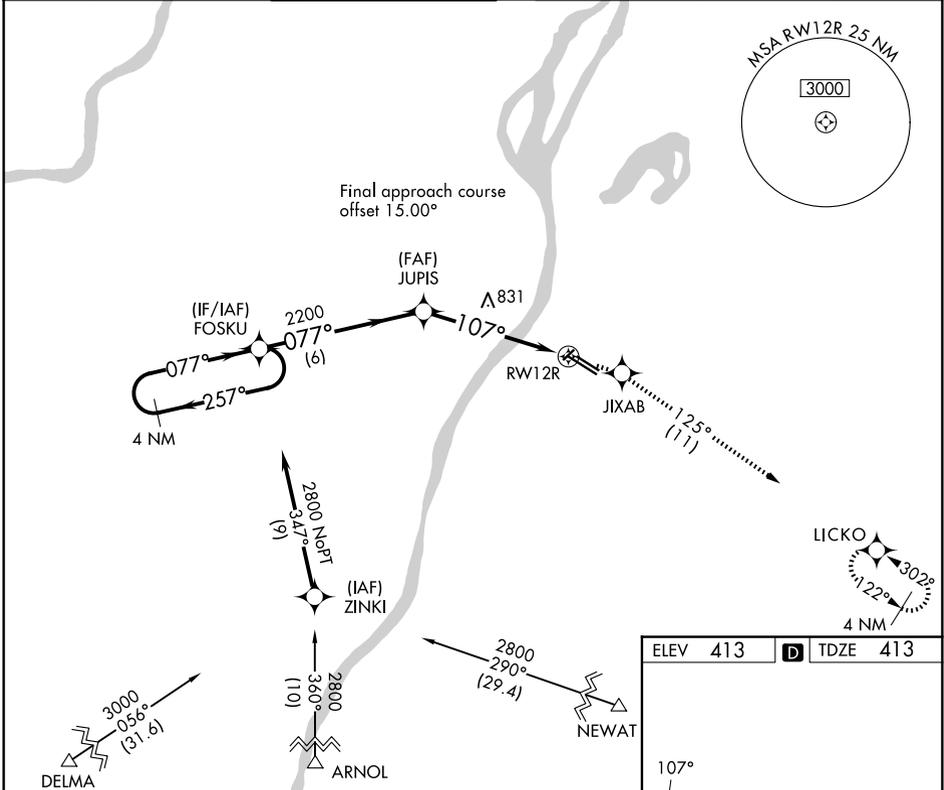

ELEV	413	D	TDZE	413
------	------------	---	------	------------

4 NM Holding Pattern	FOSKU	2200	JIXAB	LICKO
2800	←257°	077°	077°	tr 125°
VDP NA when using St Louis Lambert Intl altimeter setting.		JUPIS	2.1 NM to RW12R	
		2200	3.03°	107°
			TCH 50	
		6 NM	3.3 NM	2.1 NM
CATEGORY	A	B	C	D
LNAV MDA	1140-1	727 (800-1)	1140-2	1140-2¼
			727 (800-2)	727 (800-2¼)
CIRCLING	1140-1	727 (800-1)	1240-2½	1380-3
			827 (900-2½)	967 (1000-3)

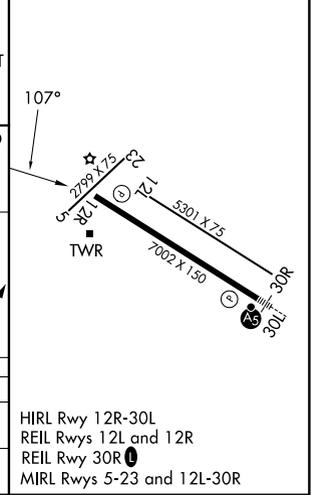

HIRL Rwy 12R-30L
REIL Rwys 12L and 12R
REIL Rwy 30R
MIRL Rwys 5-23 and 12L-30R

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026