


WAAS CH <b>78035</b> <b>W16B</b>	APP CRS <b>161°</b>	Rwy Ldg <b>3715</b> TDZE <b>186</b> Apt Elev <b>192</b>
--	------------------------	---

# RNAV (GPS) RWY 16R

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS.	MISSED APPROACH: Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.
<p>▼ Rwy 16R helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.</p>	

ATIS <b>125.175</b>	POTOMAC APP CON <b>128.525 306.925</b>	MANASSAS TOWER * <b>133.1 (CTAF) 360.75</b>	GND CON <b>121.8</b>
------------------------	---	--	-------------------------

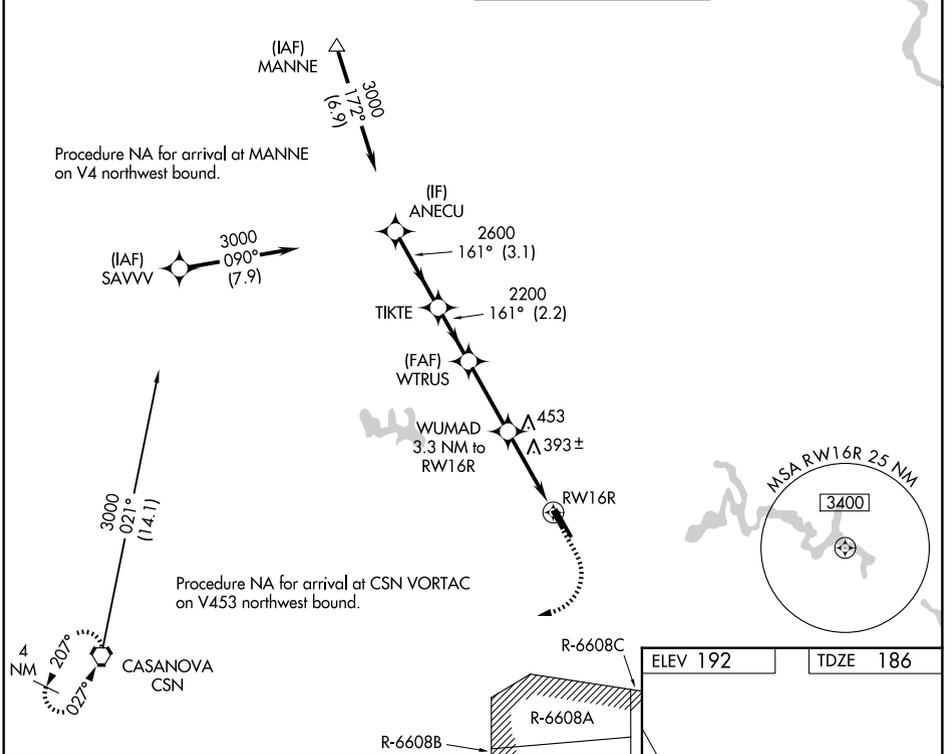

	ANECU	TIKTE	WTRUS	WUMAD	CSN
	3000	2600	2200	1280	700
	GP 3.00°			1.3 NM to RW16R	
	3.1 NM	2.2 NM	2.9 NM	2 NM	1.3 NM
CATEGORY	A	B	C	D	
LPV DA		494-7/8	308 (400-7/8)		
LNAV/VNAV DA		675-1 3/8	489 (500-1 3/8)		
LNAV MDA	660-1	474 (500-1)	660-1 3/8	474 (500-1 3/8)	
CIRCLING	720-1 528 (600-1)	740-1 548 (600-1)	840-1 3/4 648 (700-1 3/4)	880-2 1/4 688 (700-2 1/4)	

