

WAAS CH <b>56239</b> <b>W34B</b>	APP CRS <b>326°</b>	Rwy Ldg <b>3715</b> TDZE <b>182</b> Apt Elev <b>192</b>
----------------------------------------	------------------------	---------------------------------------------------------------



# RNAV (GPS) RWY 34L

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

**⚠** DME/DME RNP-0.3 NA. When local altimeter setting not received, use Washington Dulles Intl altimeter setting and increase all MDA 60 feet; increase LNAV Cat C/D and Circling Cat C and D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

**⚠** MISSED APPROACH: Climbing left turn to 3000 direct CSN VORTAC and hold.

ATIS <b>125.175</b>	POTOMAC APP CON <b>128.525 306.925</b>	MANASSAS TOWER ★ <b>133.1 (CTAF) 0 360.75</b>	GND CON <b>121.8</b>
------------------------	-------------------------------------------	--------------------------------------------------	-------------------------

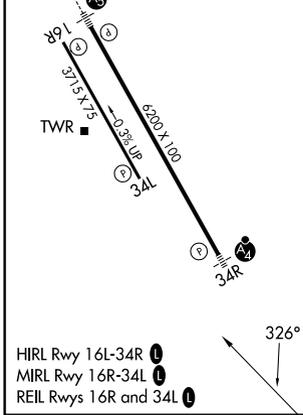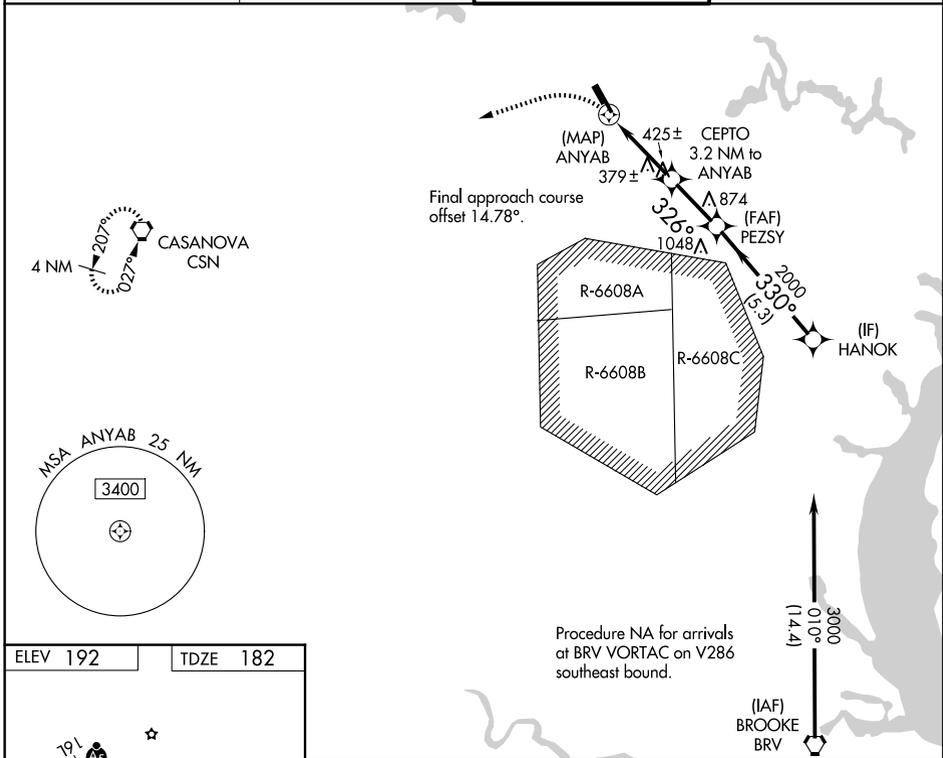

3000	CSN	VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 43).		HANOK		
		CEPTO 3.2 NM to ANYAB	PEZSY		3000	
		0.9 NM to ANYAB	326°	2000	330°	
		1260	2.79°			
		0.4	0.9	2.4 NM	2.3 NM	5.3 NM
CATEGORY		A	B	C	D	
LP	MDA	640-1	458 (500-1)	640-1 3/8	458 (500-1 3/8)	
LNAV	MDA	680-1	498 (500-1)	680-1 3/8	498 (500-1 3/8)	
CIRCLING		720-1	740-1	840-1 3/4	880-2 1/4	
		528 (600-1)	548 (600-1)	648 (700-1 3/4)	688 (700-2 1/4)	

NE-3, 19 FEB 2026 to 19 MAR 2026

NE-3, 19 FEB 2026 to 19 MAR 2026