

WAAS
CH **82508**
W14A

APP CRS
142°

Rwy Ldg
TDZE **23**
Apt Elev **23**


RNAV (GPS) RWY 14

TREASURE COAST INTL (FPR)

Baro-VNAV NA when using Vero Beach altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). When VGSI inop, Straight-in/Circling Rwy 14 procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility below 1 SM NA. When local altimeter setting not received, use Vero Beach altimeter setting and increase LPV DA to 303, LNAV/VNAV DA to 378 and all MDA 40 feet; increase LNAV visibility Cats C/D ¼ SM; increase Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 480 then climbing left turn to 2000 direct ANGEV and hold.

ATIS 134.825	PALM BEACH APP CON 132.8	FORT PIERCE TOWER ★ 128.2 (CTAF) 0	GND CON (GCO) 119.55
------------------------	------------------------------------	--	--------------------------------

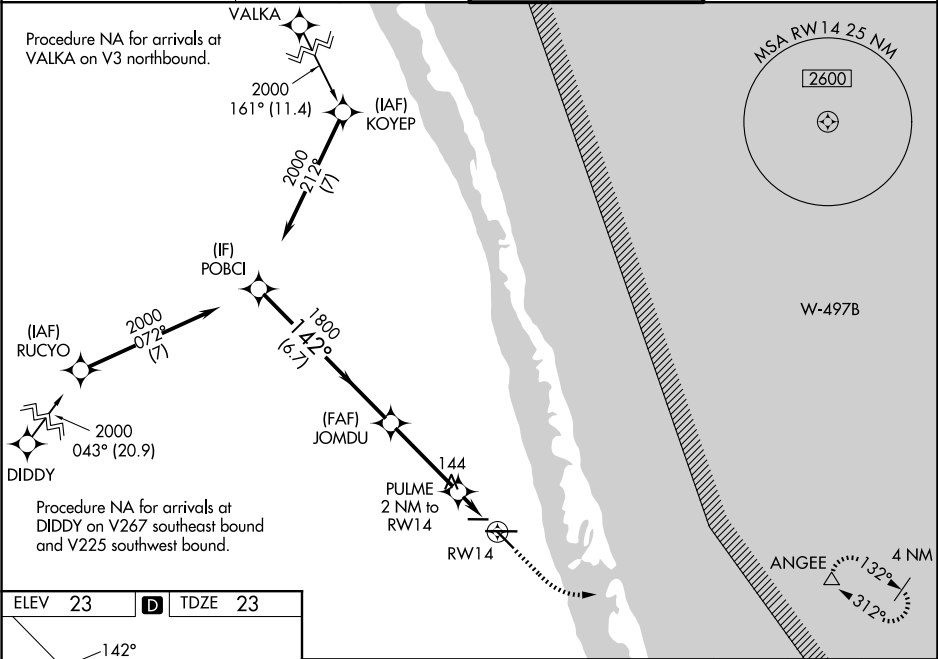

ELEV 23

D

TDZE 23

REIL Rwy 10R and 28L 0
MIRL all Rwy 0

POBCI 2000 142° JOMDU 1800 1800 6.7 NM 3.4 NM 2 NM RW14 GP 3.00° TCH 46 *700 PULME 2 NM to RW14 *LNAV only. 480 2000 ANGEV				
CATEGORY	A	B	C	D
LPV DA	280-1 257 (300-1)			
LNAV/VNAV DA	355-1½ 332 (400-1½)			
LNAV MDA	400-1 377 (400-1)			
CIRCLING	460-1 437 (500-1)	480-1 457 (500-1)	880-2½ 857 (900-2½)	880-2¾ 857 (900-2¾)