

WAAS CH 62904 W25A	APP CRS 245°	Rwy Ldg TDZE Apt Elev	5000 993 993
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25




MARION MUNI (MNN)

RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using OSU altimeter setting. Rwy 25 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 54°C. When local altimeter setting not received, use OSU altimeter setting and increase LPV DA to 1381 feet and all visibilities 1/4 SM, increase LNAV/VNAV DA to 1468 feet and all visibilities 1/4 SM; increase all MDAs 100 feet and LNAV visibility Cat C and D 3/4 SM, and Circling visibility Cats C and D 1/4 SM.

MISSED APPROACH:
Climb to 2600 direct CABDA and hold.

ASOS 119.975	CLEVELAND APP CON ★ 128.35 360.65	CLNC DEL 126.8	UNICOM 122.8 (CTAF) 0
------------------------	---	--------------------------	---------------------------------

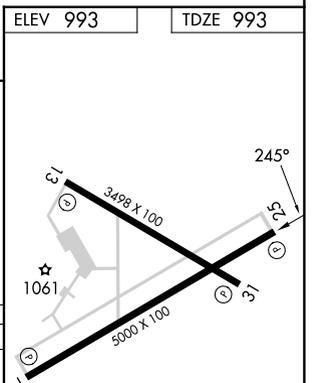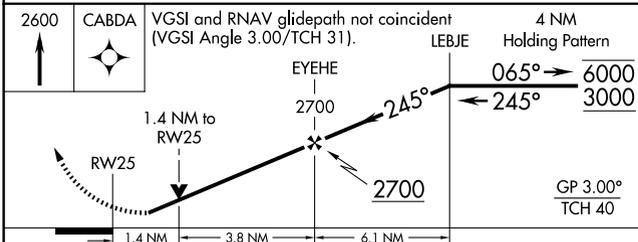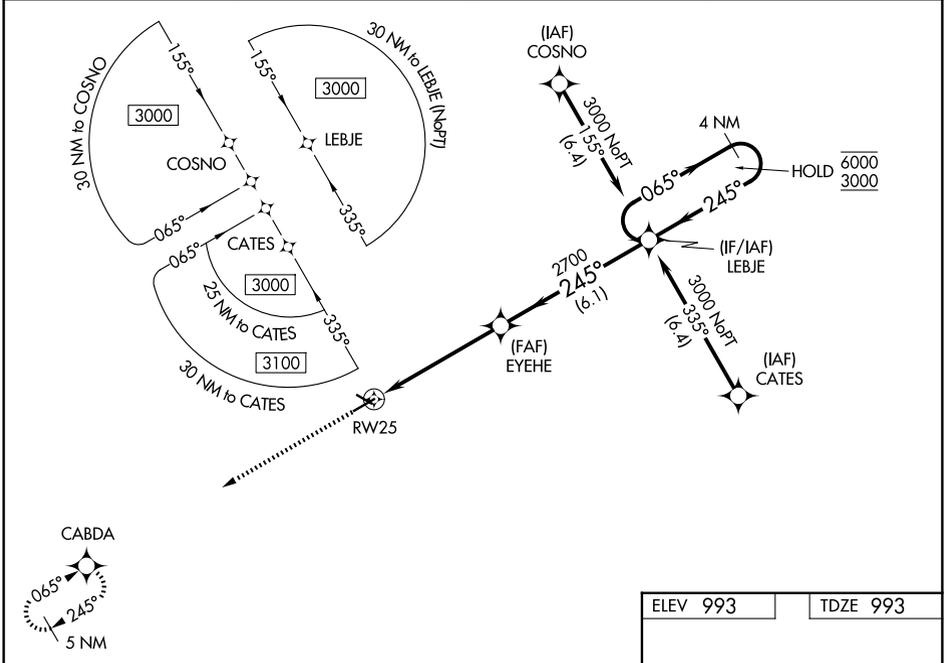

CATEGORY	A	B	C	D
LPV DA	1294-7/8		301 (400-7/8)	
LNAV/VNAV DA	1381-11/8		388 (400-11/8)	
LNAV MDA	1480-1 487 (500-1)		1480-13/8 487 (500-13/8)	
CIRCLING	1480-1 487 (500-1)		1700-2 707 (800-2) 1820-23/4 827 (900-23/4)	

ELEV 993 TDZE 993

REIL Rwy 7, 13, 25 and 31 0
MIRL Rwy 7-25 and 13-31 0

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026