


|                            |                        |                        |
|----------------------------|------------------------|------------------------|
| LOC I-ENW<br><b>109.35</b> | APP CRS<br><b>068°</b> | Rwy Idg<br><b>6600</b> |
|                            |                        | TDZE<br><b>742</b>     |
|                            |                        | Apt Elev<br><b>742</b> |

# ILS or LOC RWY 7L

KENOSHA RGNL (ENW)


|   |  |        |   |
|---|--|--------|---|
| DME required for LOC only. RNAV 1-GPS required. |  | MALSRL | MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct DIKHU and hold. |
| Circling Rwy 7R, 15 NA at night.                |  |        |   |

|                        |   |  |                           |                            |   |
|------------------------|---|--|---------------------------|----------------------------|---|
| ATIS<br><b>127.175</b> | MILWAUKEE APP CON<br><b>135.875 317.725</b> | KENOSHA TOWER *<br><b>118.6 (CTAF) 0 353.6</b> | GND CON<br><b>121.875</b> | CLNC DEL<br><b>121.875</b> | CLNC DEL<br><b>118.6</b><br>(When twr closed) |
|------------------------|---|--|---------------------------|----------------------------|---|

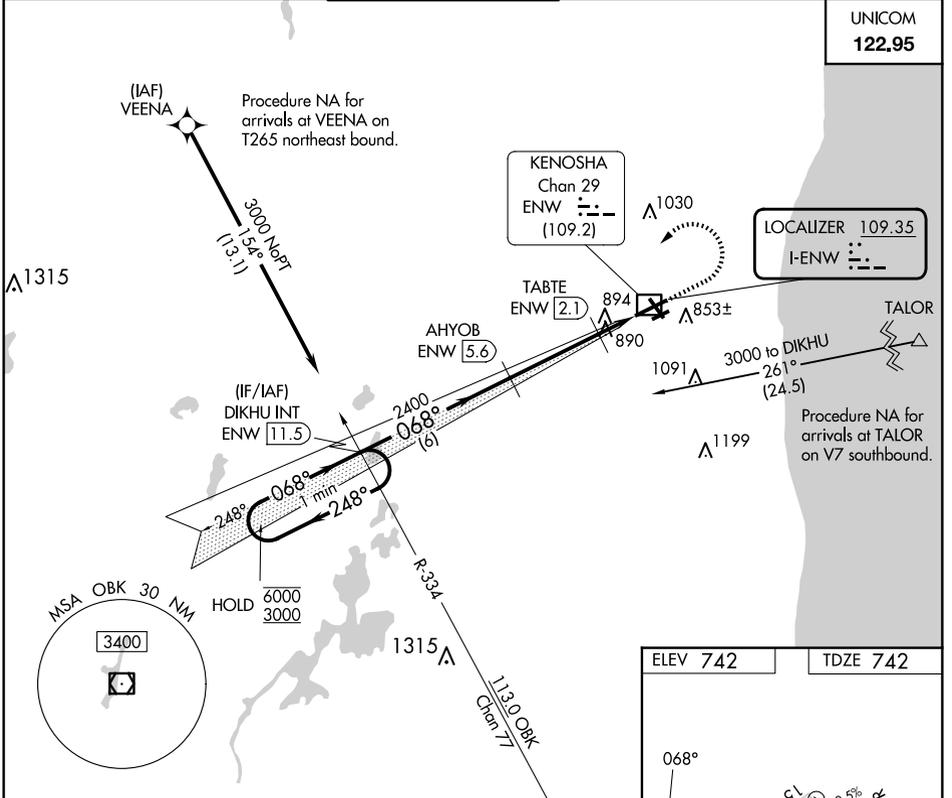

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026

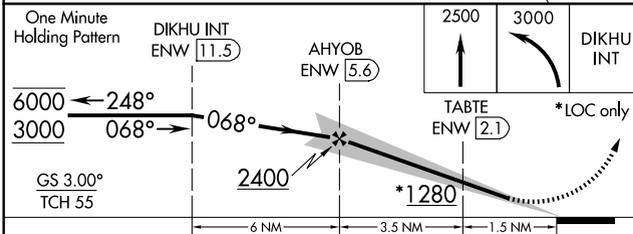

|          |          |
|----------|----------|
| ELEV 742 | TDZE 742 |
|----------|----------|

MIRL Rwy 7R-25L **1**

HIRL Rwy 7L-25R and 15-33 **1**

REIL Rwy 25R **1**

FAF to MAP 5 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:00 | 3:20 | 2:30 | 2:00 | 1:40 |

| CATEGORY          | A                     | B                     | C                             | D                             |
|-------------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
| S-ILS 7L          | 942-1/2 200 (200-1/2) |                       |                               |                               |
| S-LOC 7L          | 1140-1/2              | 398 (400-1/2)         | 1140-3/4                      | 398 (400-3/4)                 |
| <b>C</b> CIRCLING | 1200-1<br>458 (500-1) | 1340-1<br>598 (600-1) | 1400-1 3/4<br>658 (700-1 3/4) | 1440-2 1/4<br>698 (700-2 1/4) |