

| | | |
|--|------------------------|---|
| WAAS CH 45603 W35A | APP CRS 348° | Rwy Ldg 6700 TDZE 152 Apt Elev 152 |
|--|------------------------|---|

RNAV (GPS) RWY 35L



DAVID WAYNE HOOKS MEML (DWH)

RNP APCH-GPS.



Baro-VNAV and VDP NA when using George Bush Intcntl/Houston altimeter setting.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C.
 When local altimeter setting not received, use George Bush Intcntl/Houston altimeter setting and increase all DA 36 feet and all MDA 40 feet, increase LPV and LNAV/VNAV visibility all Cats 1/8 mile, LNAV visibility Cats C/D 1/4 mile. Rwy 35L helicopter visibility reduction below 3/8 SM NA.
 Circling NA to Rwys 17W and 35W. Circling Rwy 35R NA at night.

MISSED APPROACH:
Climb to 2000 direct OILER and hold.

| | | | | |
|------------------------|---------------------------------------|---|-------------------------------|-------------------------|
| ATIS 128.375 | HOUSTON APP CON 119.7 281.4 | HOOKS TOWER* 127.4 354.1 (E) 118.4 (CTAF) 354.1 (W) | GND CON 121.8 239.0 | UNICOM 122.95 |
|------------------------|---------------------------------------|---|-------------------------------|-------------------------|

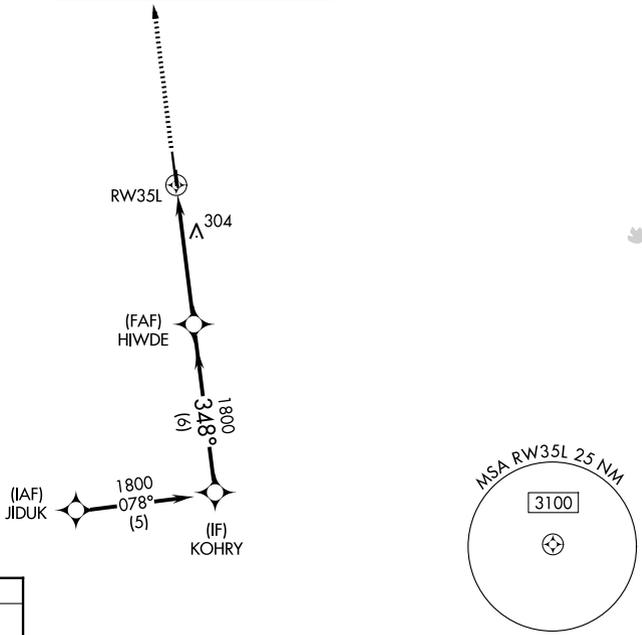

| | | |
|-----------------|----------|-----------------|
| ELEV 152 | D | TDZE 152 |
|-----------------|----------|-----------------|

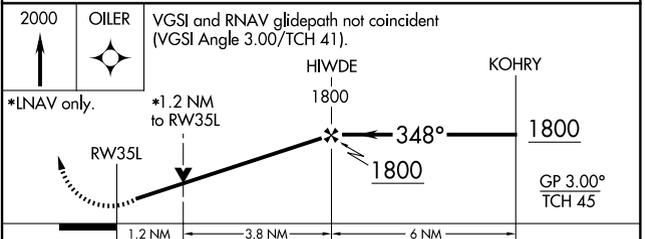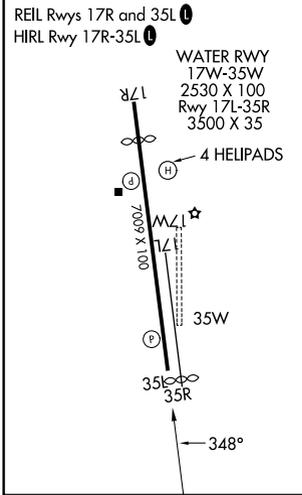

| | A | B | C | D |
|---------------|----------------------|----------------------|------------------------------|----------------------|
| CATEGORY | | | | |
| LPV DA | | 451-1 | 299 (300-1) | |
| LNAV/ VNAV DA | | 552-1 3/8 | 400 (400-1 1/8) | |
| LNAV MDA | 560-1 | 408 (500-1) | 560-1 1/8 | 408 (500-1 1/8) |
| CIRCLING | 640-1 488 (500-1) | 660-1 508 (600-1) | 680-1 1/2 528 (600-1 1/2) | 780-2 628 (700-2) |

SC-5, 19 FEB 2026 to 19 MAR 2026

SC-5, 19 FEB 2026 to 19 MAR 2026