

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 90409 W12A | APP CRS 120° | Rwy Ldg TDZE Apt Elev | 5000 1274 1274 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 12


DENISON MUNI (DNS)

RNP APCH-GPS.


⚠ Circling NA to Rwy 18 and 36. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Carroll altimeter setting.
⚠ When local altimeter setting not received, use Carroll altimeter setting; increase LPV DA 1596 feet, LNAV/VNAV DA to 1626 feet; increase all MDAs 80 feet and visibility LNAV Cat C 1/8 SM and Circling Cat C 1/4 SM.

MISSED APPROACH:
Climb to 3900 direct
OTLAZ and hold.


| | | |
|-------------------------|--|---------------------------------|
| AWOS-3 119.95 | MINNEAPOLIS CENTER 119.6 290.4 | UNICOM 122.8 (CTAF) 0 |
|-------------------------|--|---------------------------------|

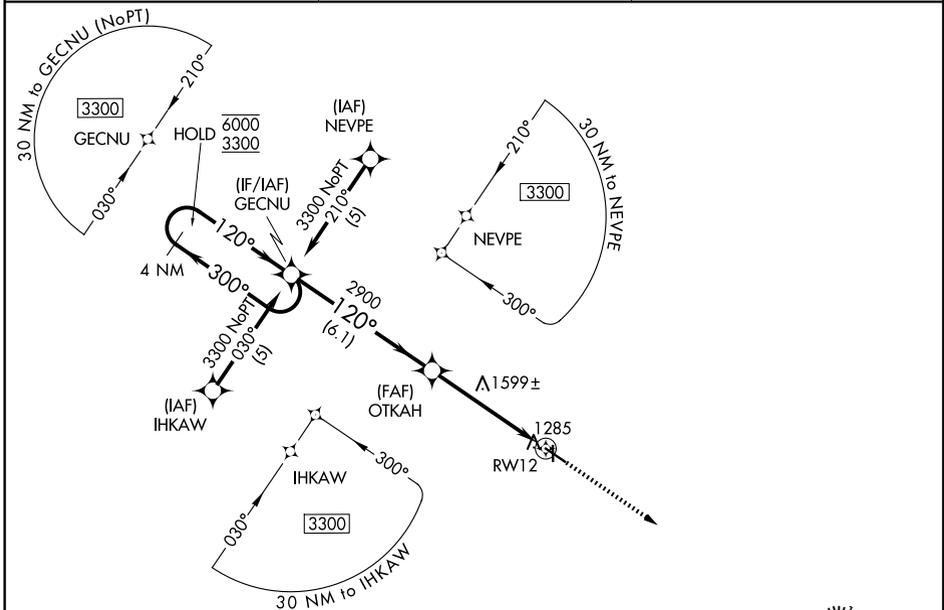

| | |
|-----------|-----------|
| ELEV 1274 | TDZE 1274 |
|-----------|-----------|

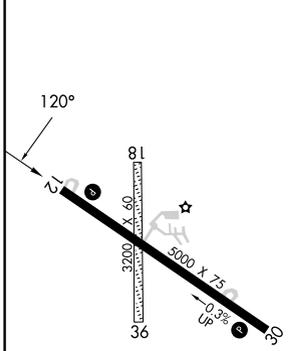

MIRM Rwy 12-30 **0**
 REIL Rwy 12 and 30 **0**

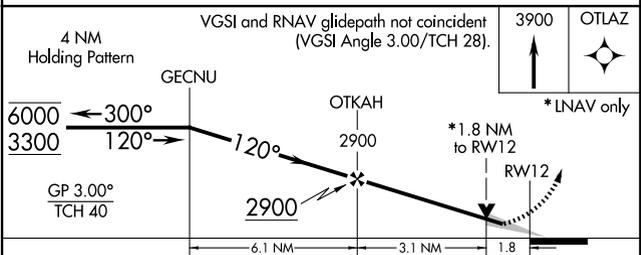

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------------|----|
| LPV DA | | 1524-1 250 (300-1) | | NA |
| LNAV/VNAV DA | | 1554-1 280 (300-1) | | NA |
| LNAV MDA | 1860-1 | 586 (600-1) | 1860-1 3/4 586 (600-1 3/4) | NA |
| CIRCLING | 1860-1 586 (600-1) | 1880-1 606 (700-1) | 2100-2 1/2 826 (900-2 1/2) | NA |

NC-3, 19 FEB 2026 to 19 MAR 2026

NC-3, 19 FEB 2026 to 19 MAR 2026