


WAAS CH <b>97599</b> <b>W15A</b>	APP CRS <b>149°</b>	Rwy Ldg <b>10000</b> TDZE <b>95</b> Apt Elev <b>96</b>
--	------------------------	--

# RNAV (GPS) RWY 15R


GEORGE BUSH INTCNL/HOUSTON (IAH)

RADAR required for procedure entry. RNP APCH.		MALSR 	MISSED APPROACH: Climb to 2000 direct JINIP and left turn on track 079° to COSBI and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5500, and LNAV Cat C/D/E visibility to 1 3/8 SM.			

D-ATIS <b>124.05</b>	HOUSTON APP CON <b>120.05 379.1 E</b> <b>124.35 316.15 W</b>	HOUSTON TOWER <b>127.3 288.25</b>	GND CON <b>121.7</b>
-------------------------	--	--------------------------------------	-------------------------

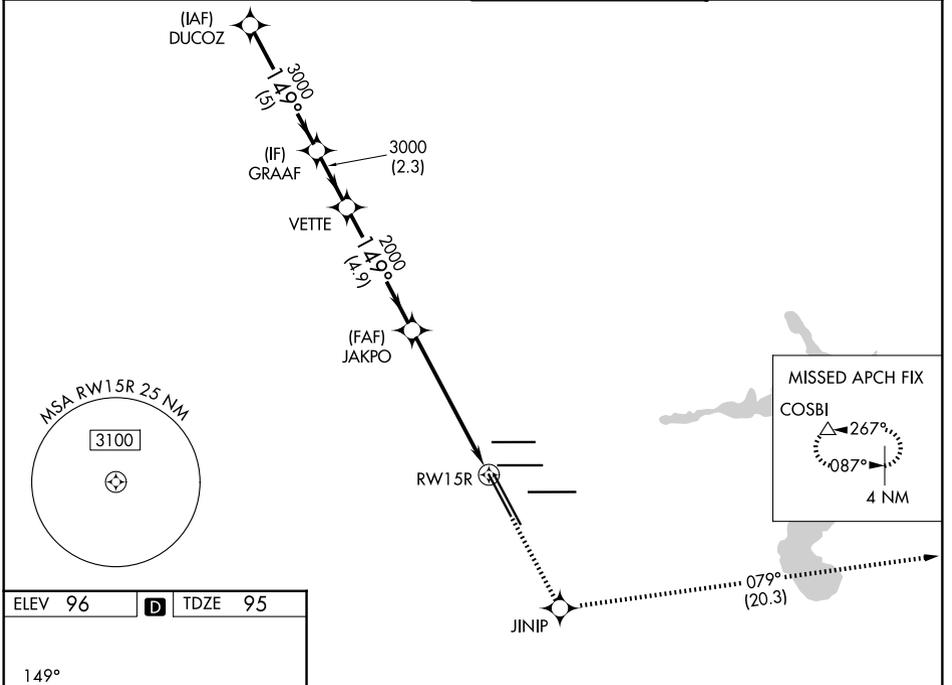

ELEV 96	<b>D</b>	TDZE 95
---------	----------	---------

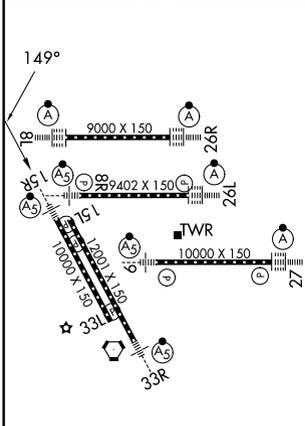

TDZ/CL Rwy 8R, 8L, 15R, 26R, 26L, 27 and 33L  
HIRL all Rwy

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).		2000 JINIP	tr 079°	COSBI	
DUCOZ	GRAAF	VETTE	JAKPO	RWY 15R	
3000	3000	3000	2000	2000	
GP 3.00° TCH 54			*1.3 NM to RWY 15R	*LNAV only.	
	5 NM	2.3 NM	4.9 NM	4.5 NM	
			1.3 NM		
CATEGORY	A	B	C	D	E
LPV DA		295/18	200 (200-1/2)		
LNAV/VNAV DA		460/35	365 (400-3/4)		
LNAV MDA	580/24	485 (500-1/2)	580/50	485 (500-1)	