

WAAS CH 53626 W08B	APP CRS 087°	Rwy Ldg TDZE 96 Apt Elev 96	9402
----------------------------------------	------------------------	-------------------------------------------------	-------------

RNAV (GPS) Z RWY 8R

GEORGE BUSH INTCNL/HOUSTON (IAH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop MALS R, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 6000, and LNAV Cat C/D/E visibility to 1 $\frac{1}{2}$ %. Simultaneous approach authorized with Rwy 8L and Rwy 9. DME/DME RNP-0.3 NA. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

MALS R

 MISSED APPROACH:
 Climb to 3000 direct
 MKAYE and hold.

D-ATIS
124.05

HOUSTON APP CON
120.05 379.1 E
124.35 316.15 W






HOUSTON TOWER
125.35 290.2

GND CON
118.575


RADAR REQUIRED



SEE INSET
FOR
ROUTING
TO BGBK

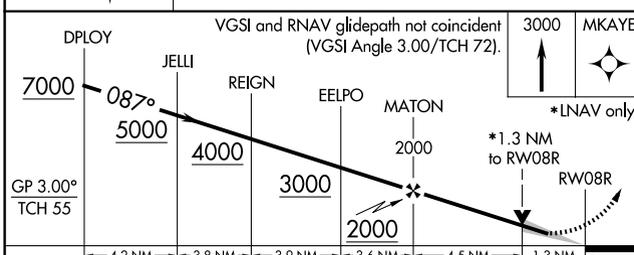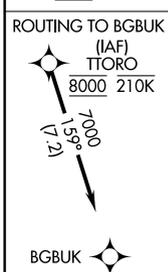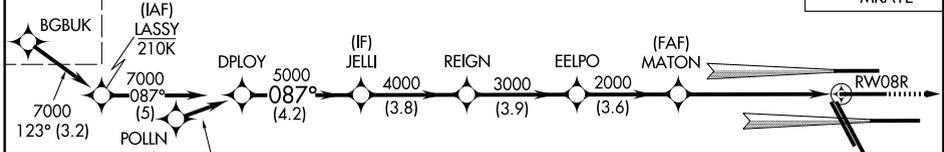

ELEV 96 **D** TDZE 96

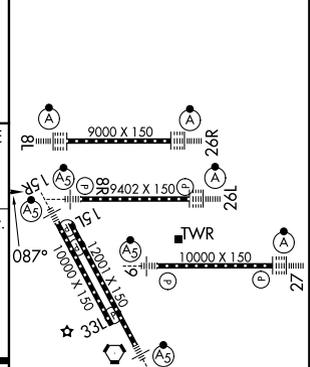

GP 3.00° TCH 55	DPLOY	JELLI	REIGN	EELPO	MATON	MKAYE
	4.2 NM	3.8 NM	3.9 NM	3.6 NM	4.5 NM	1.3 NM
CATEGORY	A	B	C	D	E	
LPV DA	296/18		200 (200- $\frac{1}{2}$)			
LNAV/VNAV DA	421/32		325 (400- $\frac{5}{8}$)			
LNAV MDA	580/24	484 (500- $\frac{1}{2}$)	580/50	484 (500-1)		

HIRL all Rwy's
 TDZ/CL Rwy's 8L/R, 15R, 26L/26R,
 27 and 33L

SC-5, 19 FEB 2026 to 19 MAR 2026

SC-5, 19 FEB 2026 to 19 MAR 2026