


WAAS CH 99313 W19A	APP CRS 190°	Rwy Idg 6604 TDZE 91 Apt Elev 91
--	------------------------	---

RNAV (GPS) RWY 19


T Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV RNP-3, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).
A DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.


MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT 118.425	MOBILE APP CON ★ 118.5 269.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

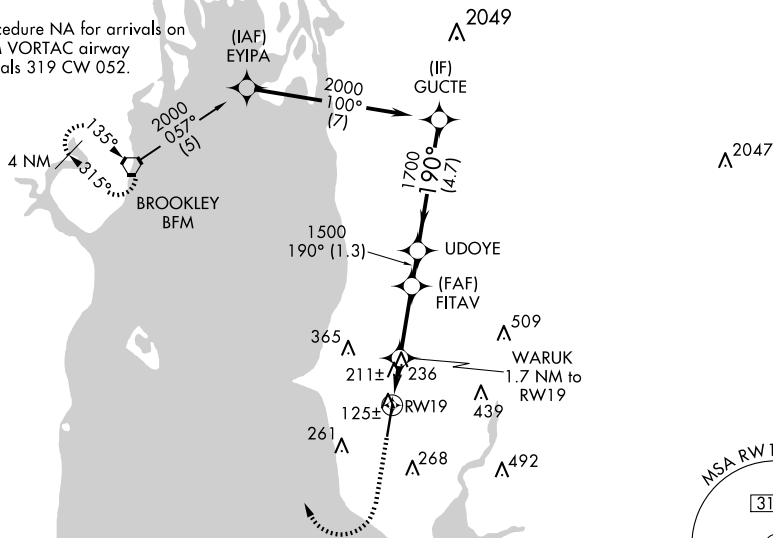

ELEV 91		TDZE 91
---------	--	---------

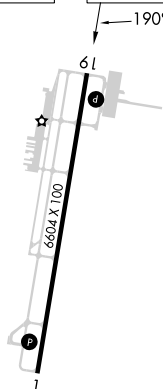

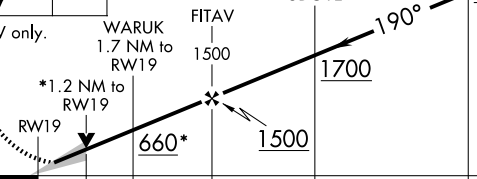1500 ↑	2000 ↗	BFM 						
*LNAV only.								
CATEGORY		A		B		C		D
LPV DA		341-7/8 250 (300-7/8)						
LNAV/ VNAV DA		513-1½ 422 (500-1½)						
LNAV MDA		500-1 409 (500-1)		500-1½ 409 (500-1½)				
CIRCLING		560-1 469 (500-1)		580-1 489 (500-1)		720-1¾ 629 (700-1¾)		740-2 649 (700-2)