

LOC/DME I-CBF <b>111.35</b> Chan <b>50(Y)</b>	APP CRS <b>357°</b>	Rwy Idg <b>5500</b> TDZE <b>1245</b> Apt Elev <b>1245</b>
---	------------------------	---



# ILS or LOC RWY 36

COUNCIL BLUFFS MUNI (CBF)

**V** VDP NA with Eppley Airfield altimeter setting. When local altimeter setting not received, use Eppley Airfield altimeter setting and increase S-ILS 36 DA to 1498 feet, and all MDA 60 feet and increase S-LOC 36 Cats C and D and Circling Cat C and D visibility ¼ SM. HODIN fix minimums: increase Circling Cat C and D visibility ¼ SM.

**MISSED APPROACH:** Climb to 3000 then right turn direct OVR VORTAC and hold.

AWOS-3 <b>126.575</b>	OMAHA APP CON <b>124.5 263.0</b>	CLNC DEL <b>127.675</b>	UNICOM <b>122.725 (CTAF)</b>
--------------------------	-------------------------------------	----------------------------	---------------------------------

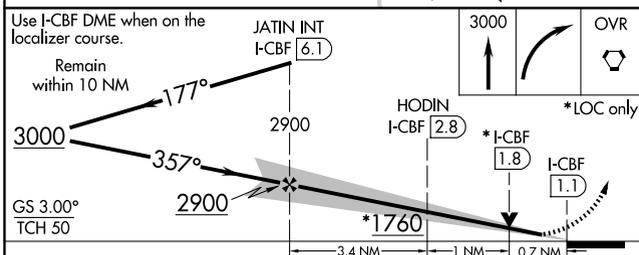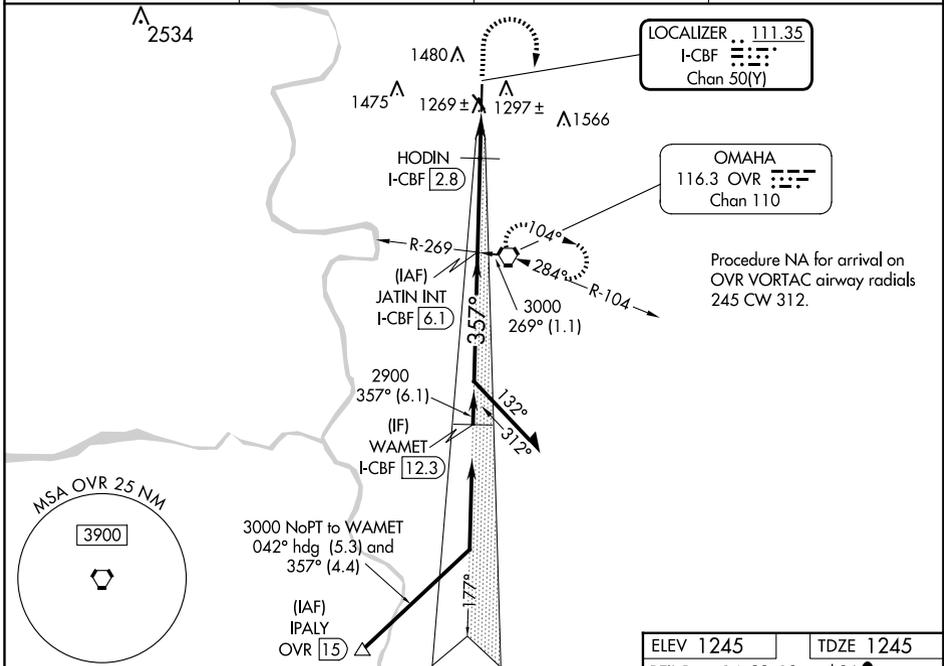

ELEV 1245	TDZE 1245
-----------	-----------

REIL Rws 14, 32, 18, and 36  
MIRL Rwy 14-32  
HIRL Rwy 18-36

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

CATEGORY	A	B	C	D
S-ILS 36		1445-¾ 200 (200-¾)		
S-LOC 36	1760-1	515 (600-1)	1760-1⅜	515 (600-1⅜)
<b>C</b> CIRCLING	1780-1 535 (600-1)	1840-1 595 (600-1)	1840-1½ 595 (600-1½)	1880-2 635 (700-2)
HODIN FIX MINIMUMS				
S-LOC 36	1520-1 275 (300-1)			
<b>C</b> CIRCLING	1780-1 535 (600-1)	1840-1 595 (600-1)	1840-1½ 595 (600-1½)	1880-2 635 (700-2)

NC-3, 19 FEB 2026 to 19 MAR 2026

NC-3, 19 FEB 2026 to 19 MAR 2026