

LOC I-RUQ 109.95	APP CRS 202°	Rwy Ldg TDZE Apt Elev	5501 772 772
----------------------------	------------------------	-----------------------------	-----------------------------------------

ILS or LOC RWY 20


MID-CAROLINA RGNL (RUQ)

ADF REQUIRED. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet; increase S-LOC Cats C/D visibility 1/8 SM and Circling Cat D visibility 1/4 SM. For inop ALS when using Lexington altimeter setting, increase S-LOC 20 Cats C and D visibility to 1 1/4 mile.

MALSR
MISSED APPROACH: Climb to 1600 then climbing right turn to 2900 direct ROVDY LOM and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	UNICOM 122.725 (CTAF) 0
--------------------------	-------------------------------------------	-----------------------------------



ADF REQUIRED

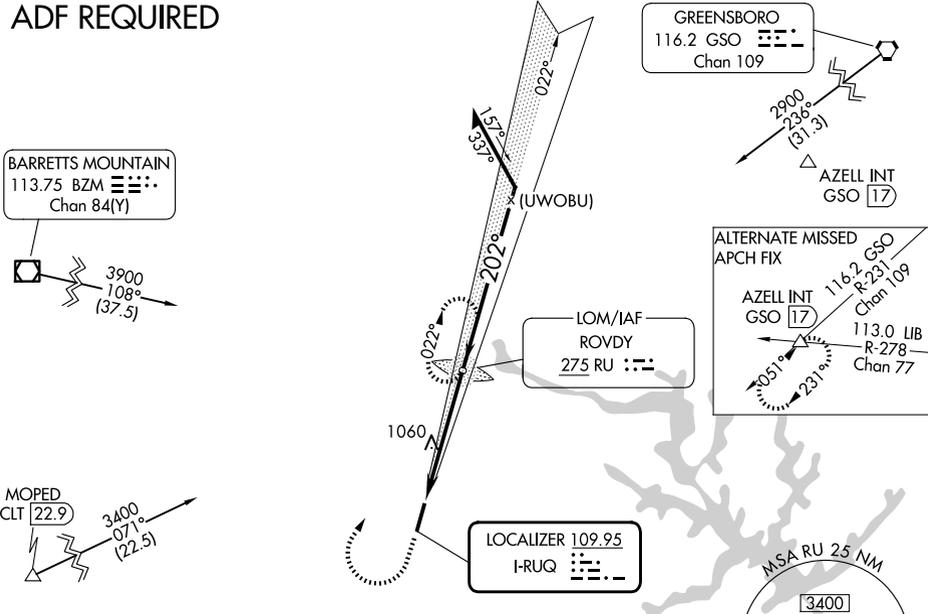

SE-2, 19 FEB 2026 to 19 MAR 2026

SE-2, 19 FEB 2026 to 19 MAR 2026

ELEV 772	TDZE 772
----------	----------

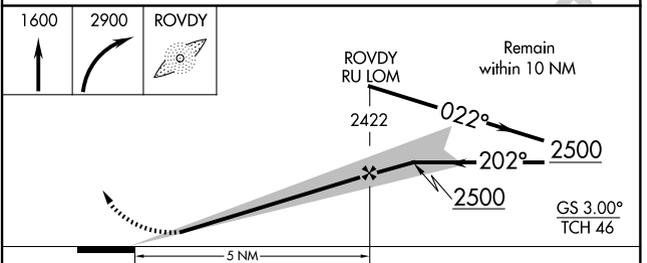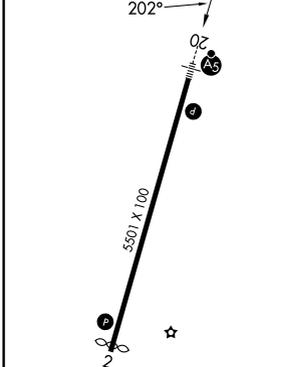

CATEGORY	A	B	C	D
S-ILS 20	972-1/2		200 (200-1/2)	
S-LOC 20	1360-1/2 588 (600-1/2)		1360-1/4 588 (600-1/4)	
CIRCLING	1360-1 588 (600-1)		1440-1 1/4 668 (700-1/4) 1440-2 668 (700-2)	

MIRL Rwy 2-20
REIL Rwys 2 and 20

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40