

WAAS CH 42521 W20A	APP CRS 202°	Rwy Ldg TDZE 772 Apt Elev 772
--	------------------------	---


RNAV (GPS) RWY 20

MID-CAROLINA RGNL (RUQ)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4°F) or above 39° C (102°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet, increase LNAV Cat C and D visibility 1/8 SM and Circling Cat C visibility 1/8 SM and Circling Cat D 1/4 SM. For inop ALS when using Lexington altimeter setting, increase LNAV Cat C and D visibility to 1 1/4 SM. VDP and Baro-VNAV NA when using Lexington altimeter setting. For inop ALS, increase LNAV/VNAV visibility to 3/8 SM all Cats.


MALSR
 MISSED APPROACH:
Climb to 2100 then climbing right turn to 3400 direct YIDPO and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	UNICOM 122.725 (CTAF) 
--------------------------	---	---

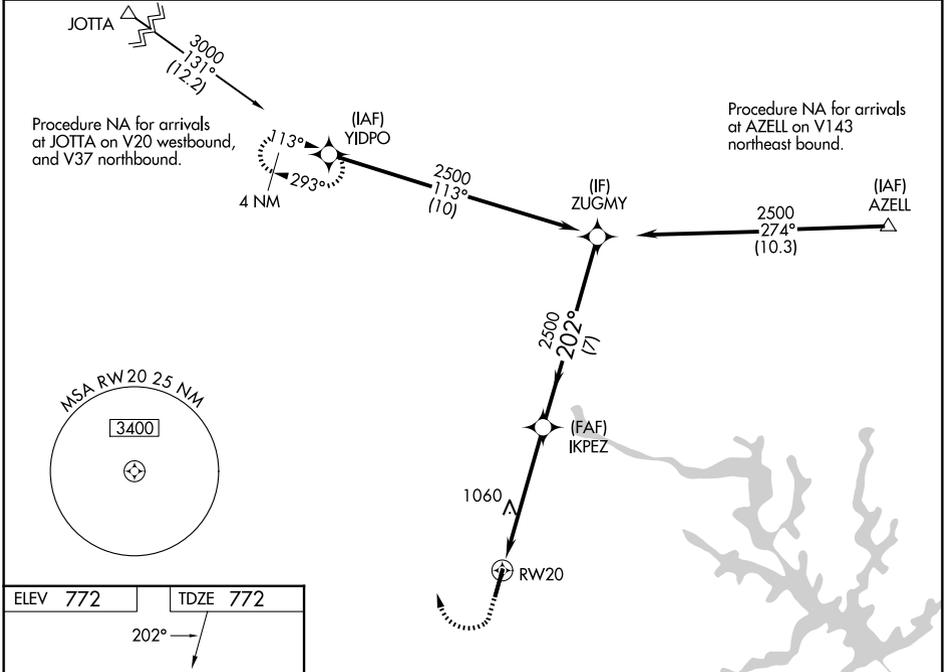

SE-2, 19 FEB 2026 to 19 MAR 2026

SE-2, 19 FEB 2026 to 19 MAR 2026

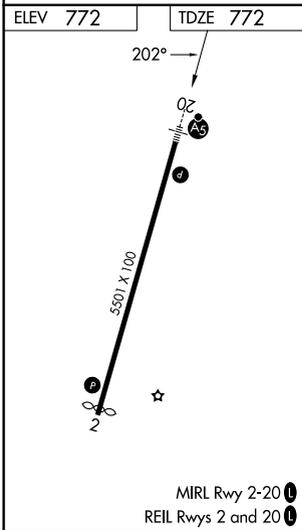

2100	3400	YIDPO		
				
*LNAV only.				
RW20	IKPEZ 2500	ZUGMY 2500		
1.7 NM	3.6 NM	7 NM		
*1.7 NM to RW20				
GP 3.00° TCH 46				
CATEGORY	A	B	C	D
LPV DA	972-1/2		200 (200-1/2)	
LNAV/VNAV DA	1032-1/2		260 (300-1/2)	
LNAV MDA	1360-1/2 588 (600-1/2)		1360-1/4 588 (600-1/4)	
CIRCLING	1360-1 588 (600-1)		1440-1 3/4 668 (700-1 3/4) 1440-2 668 (700-2)	