

VOR/DME MML 111.0 Chan 47	APP CRS 130°	Rwy Ldg 7221 TDZE 1183 Apt Elev 1183
---	------------------------	---

VOR RWY 12
SOUTHWEST MINNESOTA RGNL MARSHALL/RYAN FLD (MML)

▼ For inop ALS, increase S-12 Cat C/D visibilities to 1% SM, CEGUL fix minimums: S-12 Cat C/D visibility to 1 SM. For inop ALS when using Tracy altimeter setting increase S-12 Cat C/D visibilities to 1% SM.

▲ NA When local altimeter setting not received, use Tracy Minimum altimeter setting and increase all MDAs 60 feet, S-12 Cat C/D visibility $\frac{1}{8}$; Circling Cat C/D visibility $\frac{1}{4}$ SM; CEGUL fix minimums: increase Circling C/D visibility $\frac{1}{4}$ SM. VDP NA when using Tracy Minimum altimeter setting.

MALSR

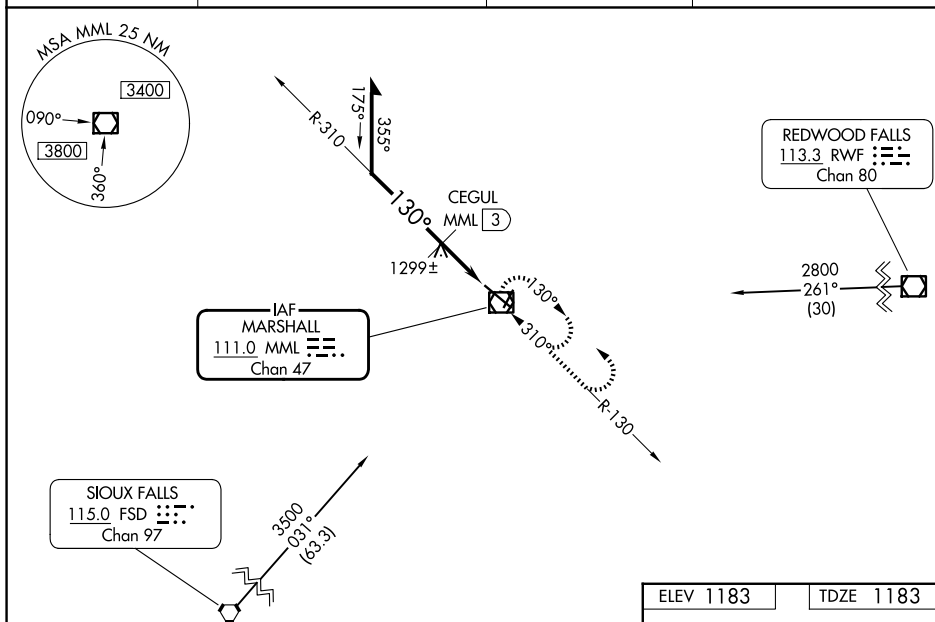


MISSED APPROACH: Climb to 2000, then climbing left turn to 2800 direct MML VOR/DME and hold.

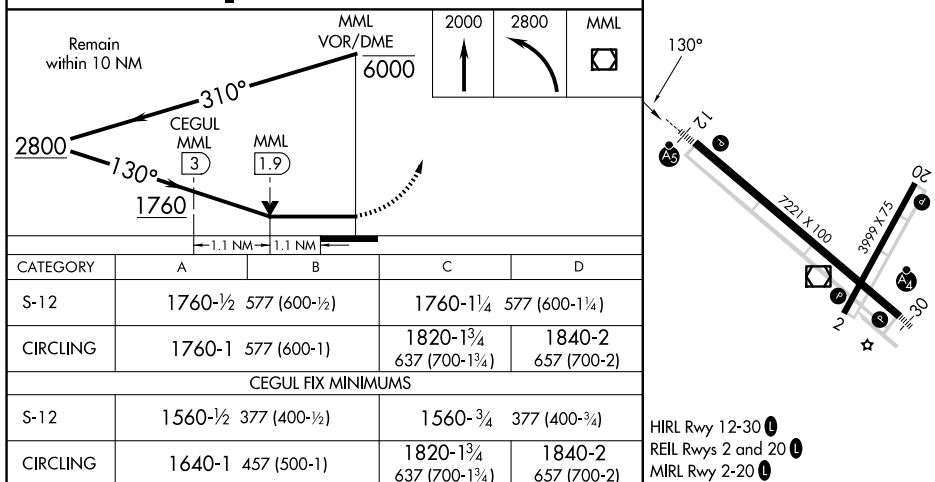
AWOS-3PT
120.150

MINNEAPOLIS CENTER
127.1 290.2

GCO
121.725

UNICOM
122.8 (CTAF) **L**

NC-1, 19 FEB 2026 to 19 MAR 2026

MARSHALL, MINNESOTA
Amdt 8C 15JUL21

SOUTHWEST MINNESOTA RGNL MARSHALL/RYAN FLD (MML)
44°27'N-95°49'W VOP PWY 12

VOR RWY 12