


WAAS CH <b>82215</b> <b>W28A</b>	APP CRS <b>277°</b>	Rwy Ldg <b>4972</b> TDZE <b>1134</b> Apt Elev <b>1136</b>
--	------------------------	---

# RNAV (GPS) RWY 28



WAYNE COUNTY (BJJ)

RNP APCH - GPS.	<p><b>▼</b> Baro-VNAV NA when using CAK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use CAK altimeter setting and increase LPV DA to 1458 feet; increase LNAV/VNAV DA to 1649 feet; increase all MDAs 60 feet; and Circling visibility Cat C/D ¼ SM.</p>	<p><b>MISSED APPROACH:</b> Climb to 3000 direct JAVNE and hold.</p>

ASOS <b>118.075</b>	CLEVELAND APP CON * <b>125.5 371.875</b>	CLNC DEL <b>121.75</b>	UNICOM <b>122.975 (CTAF) ①</b>
------------------------	---	---------------------------	-----------------------------------

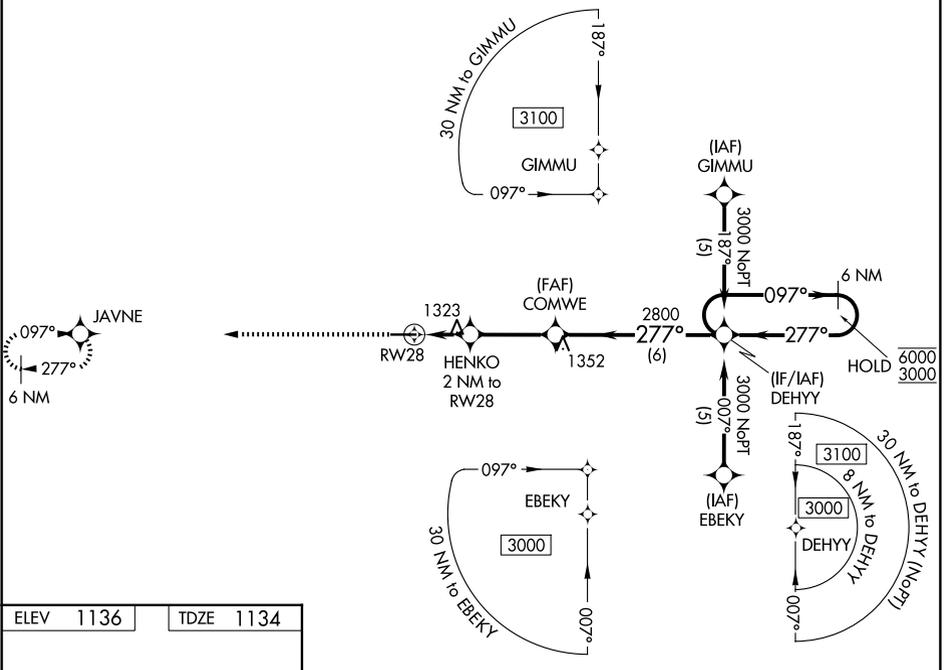

ELEV 1136	TDZE 1134
-----------	-----------

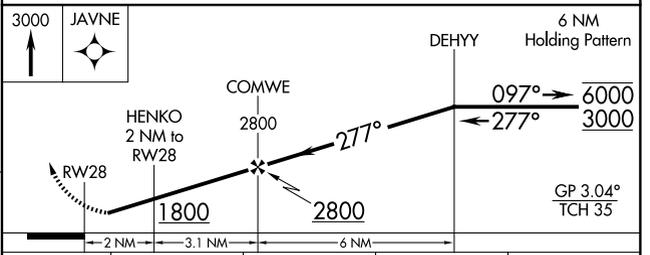

CATEGORY	A	B	C	D
LPV DA		1398-1	264 (300-1)	
LNAV/VNAV DA		1580-1½	446 (500-1½)	
LNAV MDA	1580-1	446 (500-1)	1580-1½	446 (500-1½)
CIRCLING	1600-1 464 (500-1)	1700-1 564 (600-1)	1800-1¾ 664 (700-1¾)	1840-2¼ 704 (800-2¼)

REIL Rwy 10 and 28 ①  
HIRL Rwy 10-28 ①

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026