

WAAS CH 58220 W26A	APP CRS 257°	Rwy Idg 7629 TDZE 1260 Apt Elev 1277
--	------------------------	---

RNAV (GPS) RWY 26
CENTRAL WISCONSIN (CWA)

RNP APCH - GPS.



For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct PLEAD and hold.

ATIS 127.45	MINNEAPOLIS CENTER 124.4 317.7	CWA TOWER ★ 119.75 (CTAF) 0 360.7	GND CON 121.9 360.7	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

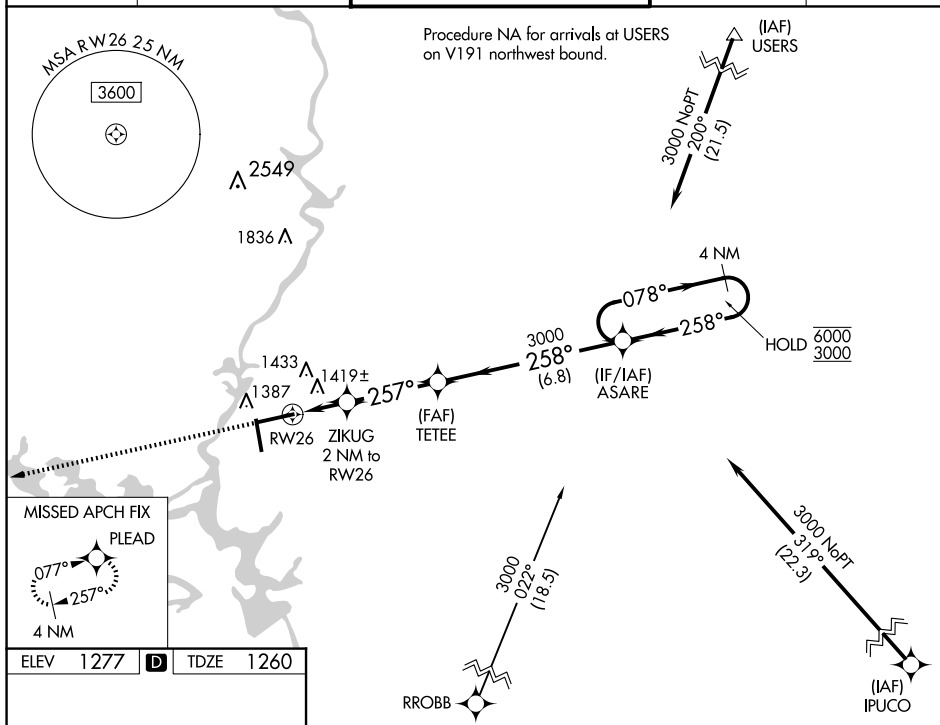


Diagram illustrating the ZIKUG 4 NM Holding Pattern. The pattern is defined by a 257° inbound leg and a 258° outbound leg, with a 078° turn. Key waypoints and distances are marked:

- Waypoints:** TWR 1355, TETEE 3000, ASARE.
- Distances:** 1.2 NM to RW26, 0.8 NM, 3.3 NM, 6.8 NM.
- Altitudes:** 3000 PLEAD, 3000 TETEE.
- Other Information:** GP 3.00°, TCH 45.

CATEGORY	A	B	C	D
LPV DA	1460-3 $\frac{3}{4}$	200 (200-3 $\frac{3}{4}$)		
LNNAV/VNAV DA	1680-1 $\frac{1}{8}$	420 (500-1 $\frac{1}{8}$)		
LNNAV MDA	1680-1	420 (500-1)	1680-1 $\frac{1}{8}$	420 (500-1 $\frac{1}{8}$)
CIRCLING	1740-1	463 (500-1)	1740-1 $\frac{1}{2}$ 463 (500-1 $\frac{1}{2}$)	1840-2 563 (600-2)

RNAV (GPS) RWY 26