
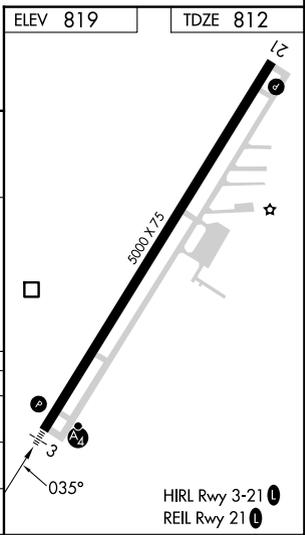
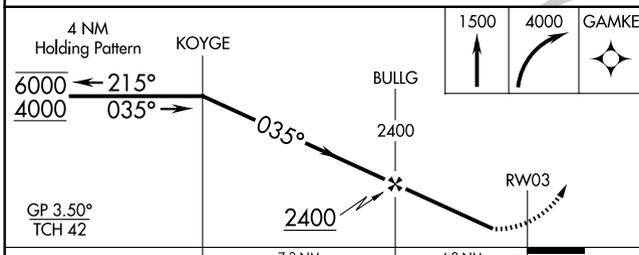


WAAS CH 45708 W03A	APP CRS 035°	Rwy Ldg TDZE 812 Apt Elev 819	5000
--	------------------------	---	-------------

RNAV (GPS) Z RWY 3

MADISON RGNL (IMS)

RNP APCH - GPS.		MALSF	MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 direct GAMKE and hold, continue climb-in-hold to 4000. * Missed approach requires minimum climb of 410 feet per NM to 1900.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 3 helicopter visibility reduction below ¾ NA.			
AWOS-3 119.175	LOUISVILLE APP CON 132.075 327.0	UNICOM 123.0 (CTAF) 0	

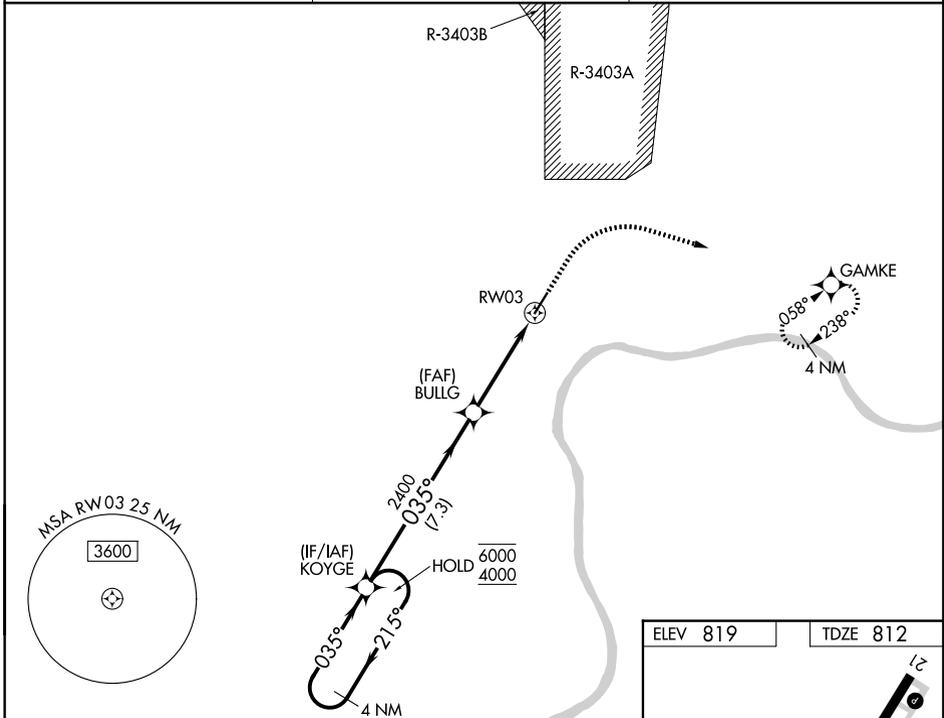

CATEGORY	A	B	C	D
LPV DA	1142-¾	330 (400-¾)		NA
LNAV/VNAV DA*	1143-¾	331 (400-¾)		NA
LNAV/VNAV DA	1420-1½	608 (700-1½)		NA

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026