

| | | |
|--|------------------------|---|
| WAAS CH 70441 W11A | APP CRS 115° | Rwy Idg 4099 TDZE 790 Apt Elev 790 |
|--|------------------------|---|

RNAV (GPS) RWY 11



GEORGETOWN EXEC (GTU)

RNP APCH

▼ Rwy 11 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Skylark Field altimeter setting and increase all MDA 80 feet. Increase LP and Circling Cat C/D visibility 1/2 SM and LNAV Cat C/D visibility 1/8 SM. VDP NA when using Skylark Field altimeter setting.

MISSED APPROACH:
Climbing left turn to 3000 direct DARTE and hold.

| | | | | | | |
|----------------------|---------------------------------------|--|---------------------------|----------------------------|---|------------------------|
| ATIS 118.6 | AUSTIN APP CON 119.0 370.85 | GEORGETOWN TOWER * 120.225 (CTAF) 0 | GND CON 119.125 | CLNC DEL 119.125 | CLNC DEL 121.1 (when twr closed) | UNICOM 123.0 |
|----------------------|---------------------------------------|--|---------------------------|----------------------------|---|------------------------|

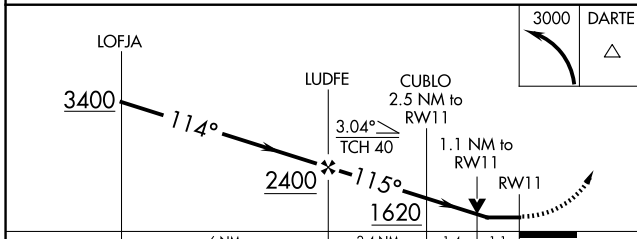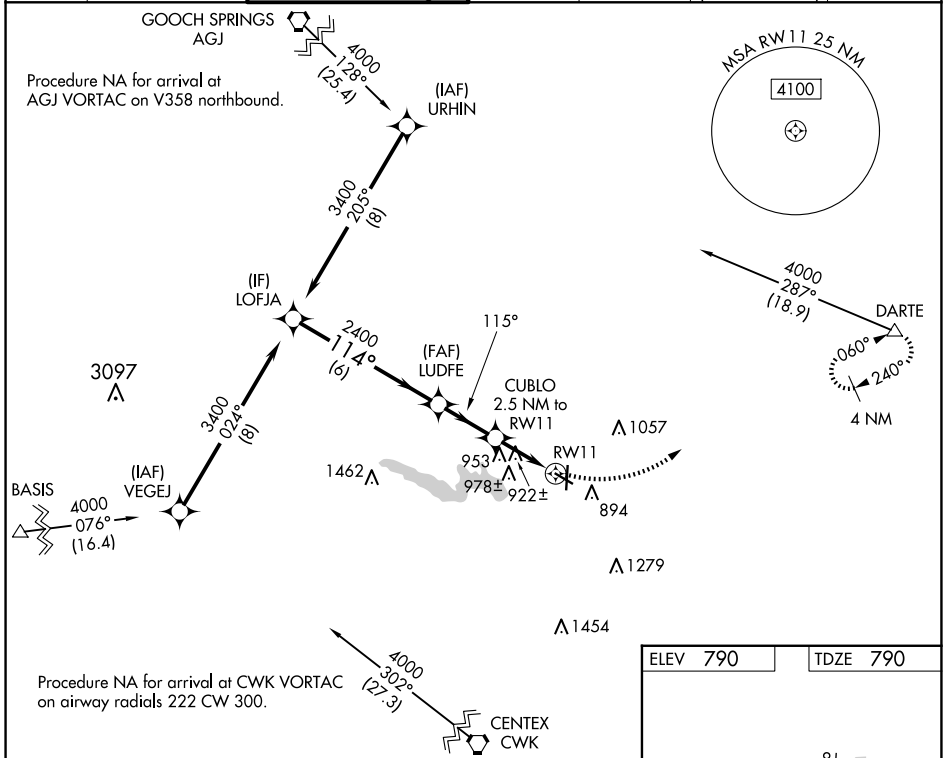

| | |
|----------|----------|
| ELEV 790 | TDZE 790 |
|----------|----------|

REIL Rwy 18 and 36 **0**
MIRL Rwy 11-29 and 18-36 **0**

| CATEGORY | A | B | C | D |
|-------------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
| LP MDA | 1180-1 | 390 (400-1) | 1180-1 1/8 | 390 (400-1 1/8) |
| LNAV MDA | 1220-1 | 430 (500-1) | 1220-1 1/4 | 430 (500-1 1/4) |
| C CIRCLING | 1240-1 450 (500-1) | 1340-1 550 (600-1) | 1360-1 1/2 570 (600-1 1/2) | 1640-2 3/4 850 (900-2 3/4) |

SC-3, 19 FEB 2026 to 19 MAR 2026

SC-3, 19 FEB 2026 to 19 MAR 2026