

| | | | |
|--|------------------------|---|-------------|
| WAAS CH 86536 W09A | APP CRS 094° | Rwy Ldg TDZE 32 Apt Elev 34 | 5000 |
|--|------------------------|---|-------------|



RNAV (GPS) RWY 9

SPACE COAST RGNL (TIX)


⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 46°C (115°F). When local altimeter setting not received, use Melbourne altimeter setting and increase all LPV DA to 352 feet, increase all LNAV/VNAV DA to 407 feet and all visibilities ¼ SM; increase all LNAV MDAs 60 feet and Cat C and D visibility ¼ SM. Rwy 9 helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Melbourne altimeter setting.

MISSED APPROACH: Climb to 800 then climbing right turn to 2800 direct CUJEN and hold.

| | | | | |
|------------------------|--|--|--------------------------|-------------------------|
| ATIS 120.625 | ORLANDO APP CON 134.95 281.425 | SPACE COAST TOWER ★ 118.9 (CTAF) 0 | GND CON 121.85 | UNICOM 122.95 |
|------------------------|--|--|--------------------------|-------------------------|

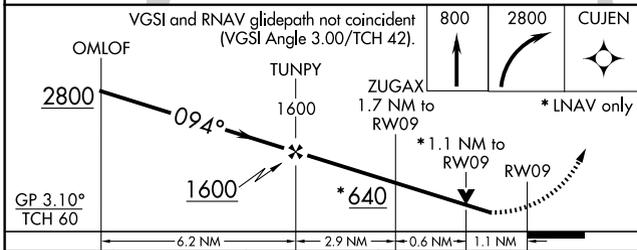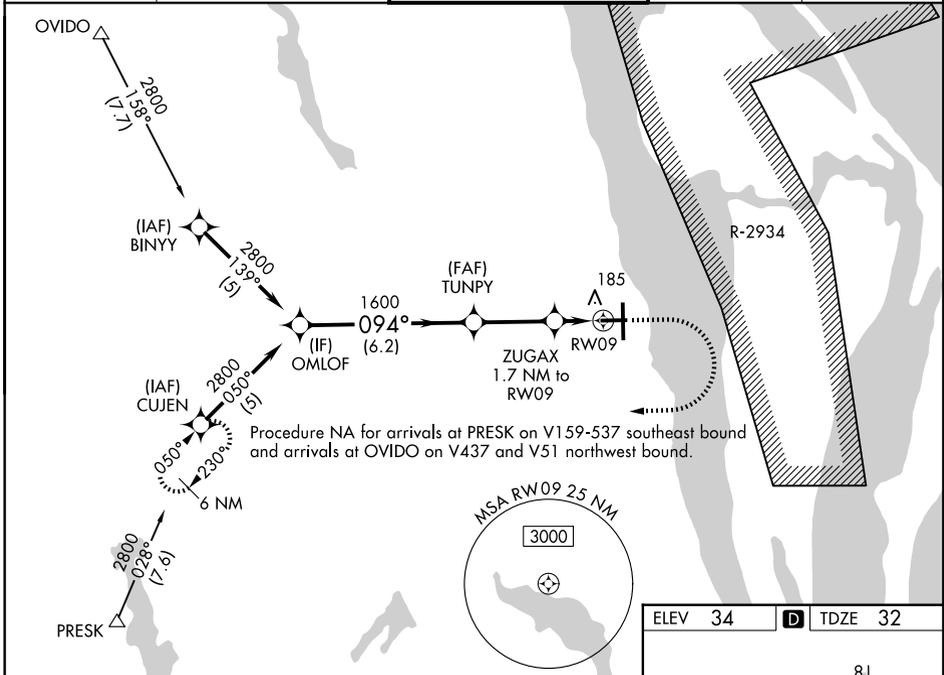

| | |
|---------|------------------|
| ELEV 34 | D TDZE 32 |
|---------|------------------|

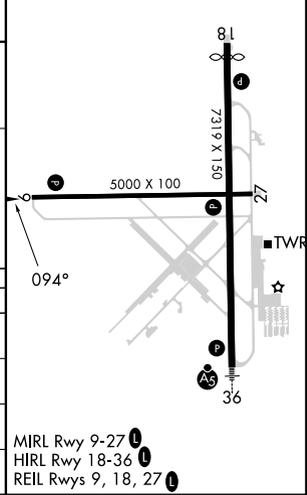

| CATEGORY | A | B | C | D |
|--------------|-------------------|-------|---------------------------|-------------------|
| LPV DA | | 292-1 | 260 (300-1) | |
| LNAV/VNAV DA | | 347-1 | 315 (400-1) | |
| LNAV MDA | 420-1 388 (400-1) | | 420-1 388 (400-1 1/2) | |
| CIRCLING | 640-1 606 (700-1) | | 640-1 3/4 606 (700-1 3/4) | 640-2 606 (700-2) |

SE-3, 19 FEB 2026 to 19 MAR 2026

SE-3, 19 FEB 2026 to 19 MAR 2026