

|  |                        |   |             |
|--|------------------------|---|-------------|
| WAAS<br>CH <b>70320</b><br><b>W23A</b> | APP CRS<br><b>227°</b> | Rwy ldg<br>TDZE <b>133</b><br>Apt Elev <b>133</b> | <b>5501</b> |
|--|------------------------|---|-------------|

# RNAV (GPS) RWY 23

WAYNE EXEC JETPORT (GWW)

RNP APCH

▼ Baro-VNAV NA when using Smithfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). VDP NA with Smithfield altimeter setting. When local altimeter setting not received, use Smithfield altimeter setting and increase LPV DA to 387 feet, LNAV/VNAV DA to 499 feet and all MDA 60 feet, increase LNAV/VNAV all Cats and LNAV Cats C/D visibilities ½ SM, and Circling Cat C/D ¼ SM. For inop ALS when using Smithfield altimeter setting, increase LNAV/VNAV visibility all Cats to 1 SM and LNAV visibility Cats A/B to 1 SM and Cats C/D to 1½ SM.

ODALS




MISSED APPROACH:  
Climb to 600 then climbing right turn to 2000 direct BRADE and hold.


AWOS-3P  
**118.975**

SEYMOUR JOHNSON APP CON ★  
**121.175 290.9**

UNICOM  
**122.975 (CTAF) 0**

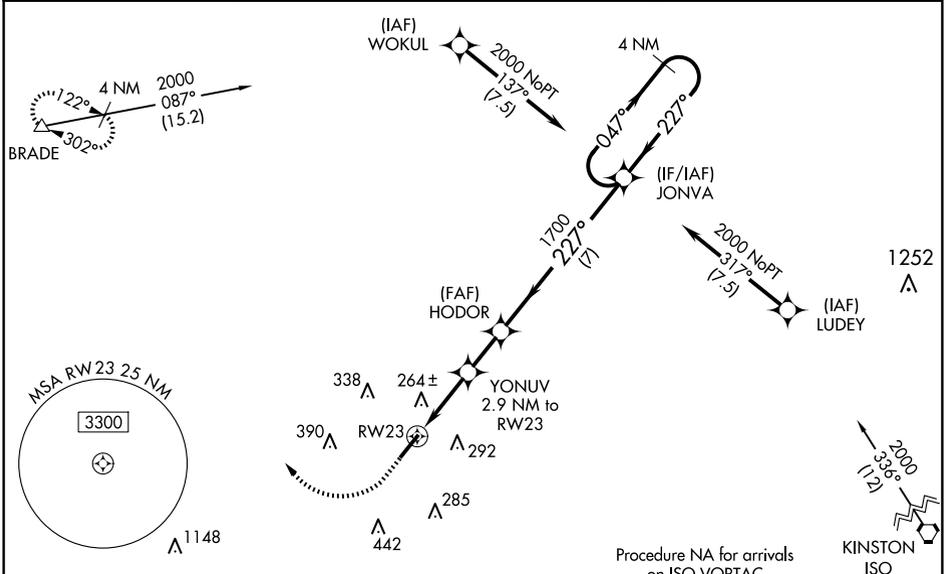

|          |          |
|----------|----------|
| ELEV 133 | TDZE 133 |
|----------|----------|

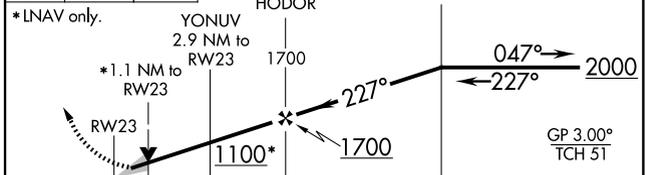

| CATEGORY     | A                    | B                    | C                      | D                    |
|--------------|----------------------|----------------------|------------------------|----------------------|
| LPV DA       |                      | 333-¾                | 200 (200-¾)            |                      |
| LNAV/VNAV DA |                      | 445-7/8              | 312 (400-7/8)          |                      |
| LNAV MDA     | 520-¾                | 387 (400-¾)          | 520-1                  | 387 (400-1)          |
| CIRCLING     | 580-1<br>447 (500-1) | 640-1<br>507 (600-1) | 760-1¾<br>627 (700-1¾) | 760-2<br>627 (700-2) |

