

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>70517</b><br><b>W21A</b> | APP CRS<br><b>209°</b> | Rwy Idg <b>4400</b><br>TDZE <b>416</b><br>Apt Elev <b>416</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 21



FARMVILLE RGNL (FVX)

RNP APCH-GPS.

▼ Baro-VNAV NA when using Lynchburg Rgnl/Preston Glenn Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Lynchburg Rgnl/Preston Glenn Fld altimeter setting and increase LPV DA to 854 feet and all visibilities ¼ SM, increase LNAV/VNAV DA to 1024 feet and all visibilities ⅓ SM, increase all MDAs 160 feet and LNAV visibility Cat C ⅓ SM. Circling Rwy 3 NA at night. Rwy 21 helicopter visibility reduction below 1 SM NA.

⚠ MISSED APPROACH: Climb to 3000 direct WAMPO and hold.

|                          |                                         |                               |
|--------------------------|-----------------------------------------|-------------------------------|
| AWOS-3<br><b>132.725</b> | ROANOKE APP CON<br><b>135.0 254.325</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|--------------------------|-----------------------------------------|-------------------------------|

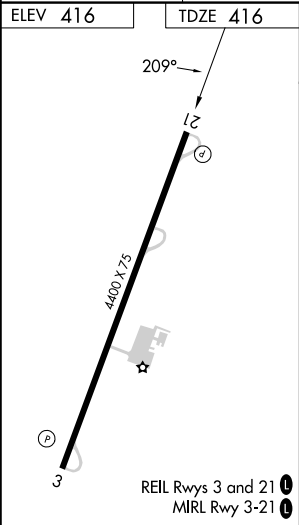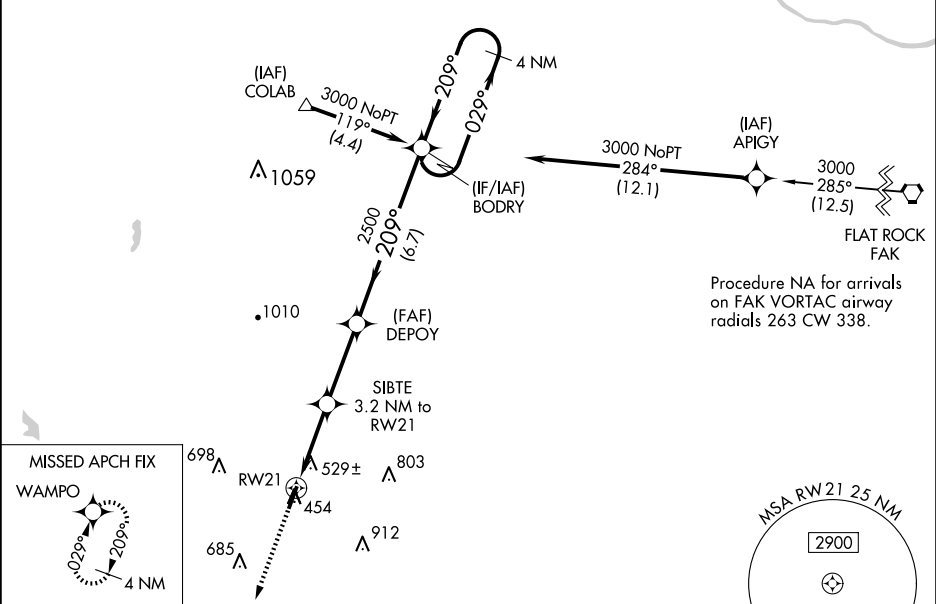

|              |                     |                                                                  |                      |                      |
|--------------|---------------------|------------------------------------------------------------------|----------------------|----------------------|
| 3000         | WAMPO               | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45). |                      | 4 NM Holding Pattern |
|              |                     | DEPOY 2500                                                       | BODRY 3000           |                      |
| RW21         |                     | SIBTE 3.2 NM to RW21                                             | GP 3.00° TCH 52      |                      |
|              |                     | 1480                                                             | 2500                 |                      |
|              |                     | 3.2 NM                                                           | 3.1 NM               | 6.7 NM               |
| CATEGORY     | A                   | B                                                                | C                    | D                    |
| LPV DA       | 696-1 280 (300-1)   |                                                                  |                      | NA                   |
| LNAV/VNAV DA | 866-1⅓ 450 (500-1⅓) |                                                                  |                      | NA                   |
| LNAV MDA     | 860-1               | 444 (500-1)                                                      | 860-1⅓ 444 (500-1⅓)  | NA                   |
| CIRCLING     | 900-1               | 484 (500-1)                                                      | 1000-1½ 584 (600-1½) | NA                   |