

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 77735 W09A | APP CRS 093° | Rwy Ldg TDZE Apt Elev | 3499 1198 1198 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 9


PORTAGE COUNTY (POV)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using CAK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 9 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use CAK altimeter setting and increase LPV DA to 1498 feet. Increase LNAV/VNAV DA to 1557 feet. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 4000 direct WHINR and hold, continue climb-in-hold to 4000.


| | | | |
|--------------------------|--|---------------------------|---|
| AWOS-3 118.675 | CLEVELAND APP CON★ 125.5 371.875 | CLNC DEL 125.65 | UNICOM 123.05 (CTAF) 0 |
|--------------------------|--|---------------------------|---|

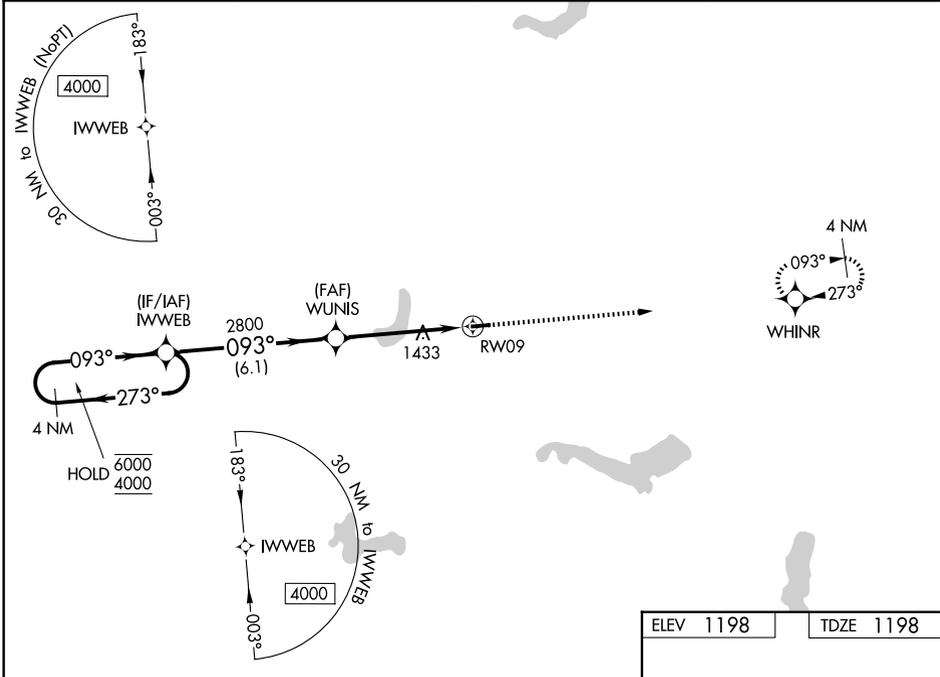

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026

| | |
|-----------|-----------|
| ELEV 1198 | TDZE 1198 |
|-----------|-----------|

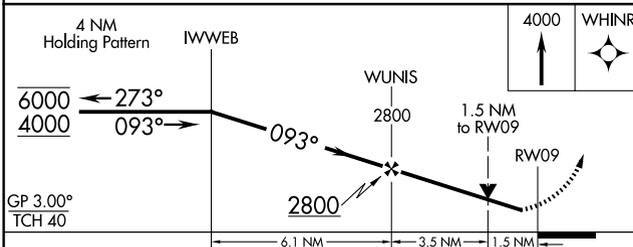

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------------|----|
| LPV DA | 1448-1 | 250 (300-1) | | NA |
| LNAV/VNAV DA | 1507-1 | 309 (400-1) | | NA |
| LNAV MDA | 1700-1 | 502 (600-1) | 1700-1 3/8 502 (600-1 3/8) | NA |
| CIRCLING | 1740-1 542 (600-1) | 1800-1 602 (700-1) | 1860-1 3/4 662 (700-1 3/4) | NA |

