

LOC/DME I-LHM 108.75 Chan 24 (Y)	APP CRS 151°	Rwy Idg 6001 TDZE 121 Apt Elev 121
--	------------------------	---



ILS or LOC RWY 15
LINCOLN RGNL/KARL HARDER FLD (LHM)

⚠ When local altimeter setting not received, use Beale AFB altimeter setting and increase DA to 361 feet and all MDAs 40 feet; increase S-LOC 1.5 Cat C/D and Circling Cat D visibility ¼ SM. VDP NA with Beale AFB altimeter setting. WIDBO fix minimums: for inop ALS, increase S-LOC 1.5 Cat D visibility to 1 mile.

MAISLR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct MYV VOR/DME and hold.

AWOS-3 124.25	NORCAL APP CON 125.4 259.1	UNICOM 123.0 (CTAF) 1
-------------------------	--------------------------------------	--

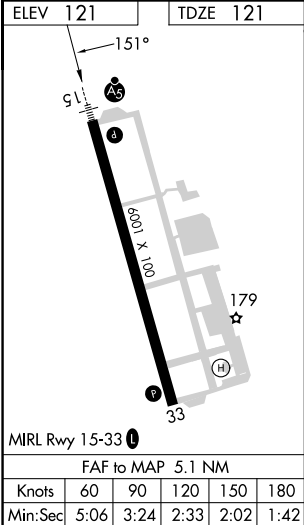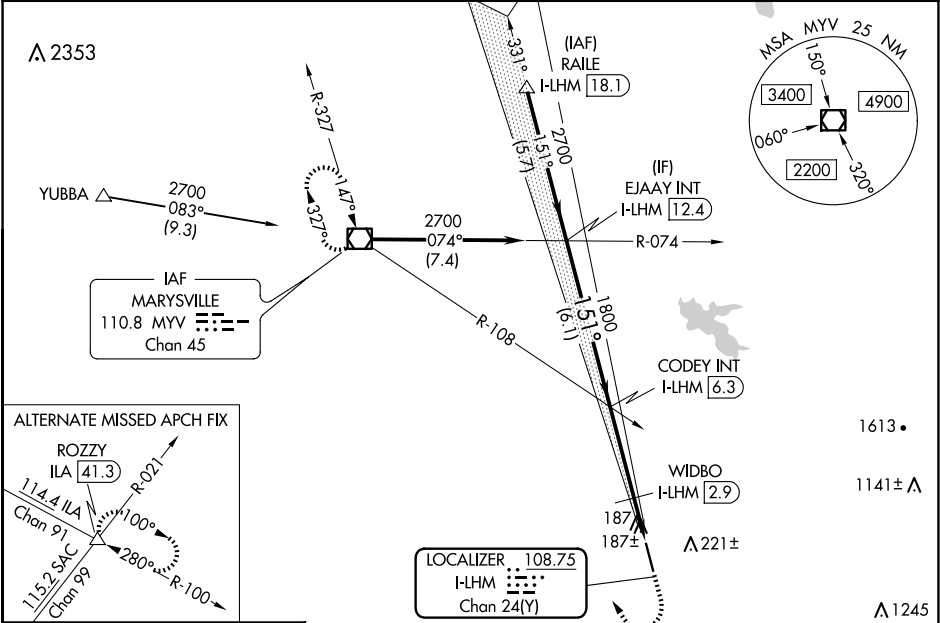

#640 when using Beale AFB altimeter setting.			
EJAAY INT I-LHM 12.4	CODEY INT I-LHM 6.3	WIDBO I-LHM 2.9	MYV
2700	1800	1800	1200 3000
GS 3.00° TCH 46	1800	1800	LOC only
6.1 NM	3.4 NM	0.8 NM	0.9 NM
CATEGORY			
S-ILS 15			
S-LOC 15			
CIRCLING			
WIDBO FIX MINIMUMS			
S-LOC 15			
CIRCLING			

SW-2, 19 FEB 2026 to 19 MAR 2026

SW-2, 19 FEB 2026 to 19 MAR 2026