

WAAS CH 70416 W24A	APP CRS 246°	Rwy Idg TDZE Apt Elev	6004 486 486
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24

LANCASTER COUNTY-MC WHIRTER FLD (LKR)

RNP APCH.


▼

⚠

When VGSI inoperative Straight-in/Circling Rwy 24 procedure NA at night. Baro-VNAV NA when using Rock Hill altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 47°C. When local altimeter setting not received, use Rock Hill altimeter setting and increase LPV DA to 805 feet, LNAV/VNAV DA to 1086 feet, and all MDA 80 feet, increase LNAV Cat C and Circling Cats C and D visibility ¼ SM.

MISSED APPROACH:
Climb to 2200 direct CORON and hold.

AWOS-3 120.825	CHARLOTTE APP CON 120.05 307.8	GCO 121.725	UNICOM 122.725 (CTAF) 0
--------------------------	--	-----------------------	-----------------------------------

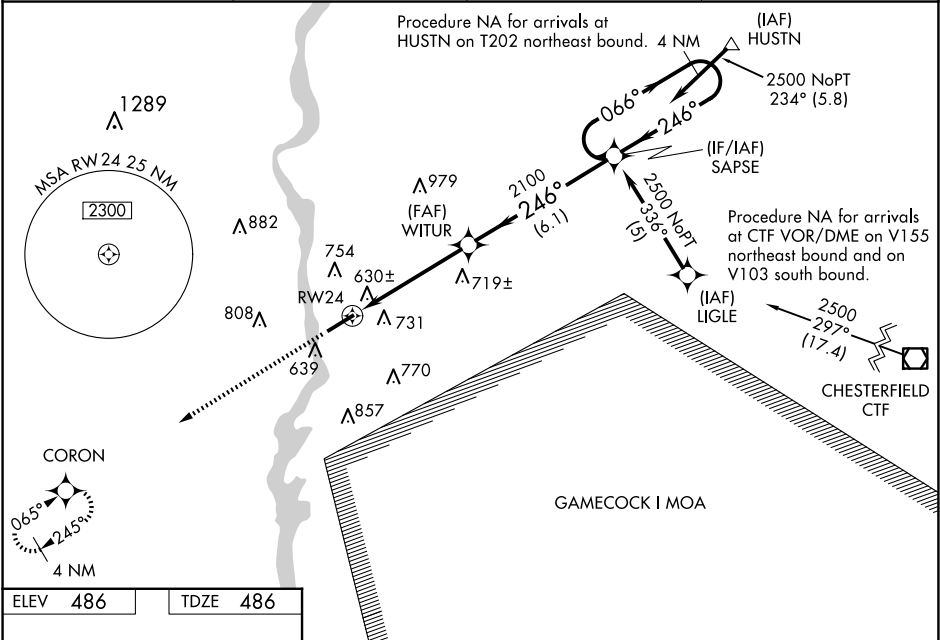

ELEV 486	TDZE 486
-----------------	-----------------

2200

CORON

246° to RW24

6004 X 101

0.4% UP

2100

WITUR

246°

2100

4.9 NM

6.1 NM

4 NM Holding Pattern

SAPSE

066°

246°

2500

GP 3.00°

TCH 43

CATEGORY	A	B	C	D
LPV DA	736-1		250 (300-1)	
LNAV/VNAV DA	1017-2		531 (600-2)	
LNAV MDA	960-1	474 (500-1)	960-1½ 474 (500-1½)	960-1½ 474 (500-1½)
CIRCLING	1040-1 554 (600-1)	1060-1 574 (600-1)	1120-1¾ 634 (700-1¾)	1160-2¼ 674 (700-2¼)

MIRL Rwy 6-24 0

REIL Rwy 6 and 24 0