

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>87104</b><br><b>W18A</b> | APP CRS<br><b>185°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5004</b><br><b>418</b><br><b>418</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 18  
PERRY-HOUSTON COUNTY (PXE)

RNP APCH-GPS.

▼




Baro-VNAV and VDP NA when using Middle Georgia Rgnl altimeter setting.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Middle Georgia Rgnl altimeter setting and increase LPV DA to 656 feet; increase LNAV/VNAV DA to 857 feet and all visibilities ½ SM. Increase all MDAs 40 feet; and Circling visibility Cat A and D ¼ SM.

MISSED APPROACH: Climb to 2300 direct SCTRY and hold.

|                          |                                         |                                   |
|--------------------------|-----------------------------------------|-----------------------------------|
| AWOS-3<br><b>123.825</b> | ATLANTA APP CON ★<br><b>124.2 279.6</b> | UNICOM<br><b>122.725 (CTAF) 0</b> |
|--------------------------|-----------------------------------------|-----------------------------------|

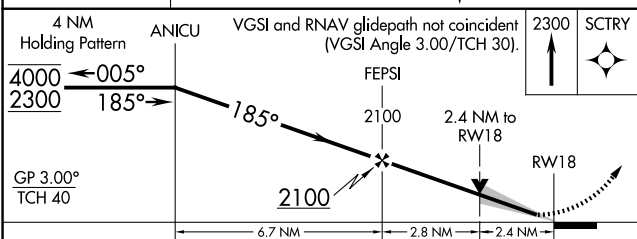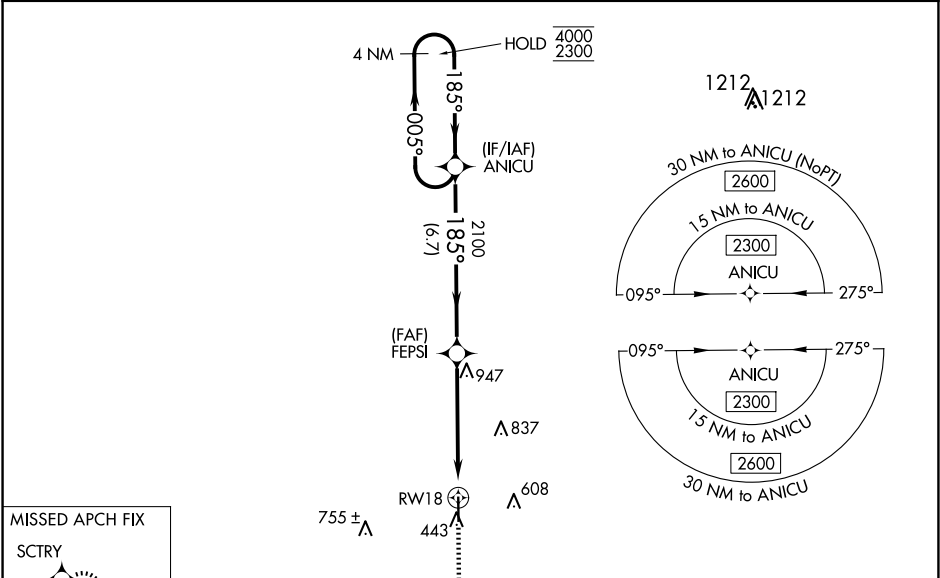

| CATEGORY     | A                     | B                             | C                             | D                             |
|--------------|-----------------------|-------------------------------|-------------------------------|-------------------------------|
| LPV DA       | 618-3/4               | 200 (200-3/4)                 |                               |                               |
| LNAV/VNAV DA | 819-1 1/8             | 401 (500-1 1/8)               |                               |                               |
| LNAV MDA     | 1200-1<br>782 (800-1) | 1200-1 1/4<br>782 (800-1 1/4) | 1200-2 1/2<br>782 (800-2 1/2) | 782 (800-2 1/2)               |
| CIRCLING     | 1200-1<br>782 (800-1) | 1200-1 1/4<br>782 (800-1 1/4) | 1200-2 1/2<br>782 (800-2 1/2) | 1280-2 3/4<br>862 (900-2 3/4) |

