WAAS CH 45805 W35B	APP CRS 356°	Rwy Ldg 13400 TDZE 564 Apt Elev 607

RNAV (GPS) RWY 35L
DALLAS-FORT WORTH INTL (DFW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 36L/R and Rwy 35R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 3000 direct BBAKR and on track 357° to BOSSI and hold.

D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775 DEP 135.925	127.075	126.55 127.5 EAST 124.15 134.9 WEST	121.65 121.8 EAST 121.85 WEST	128.25	

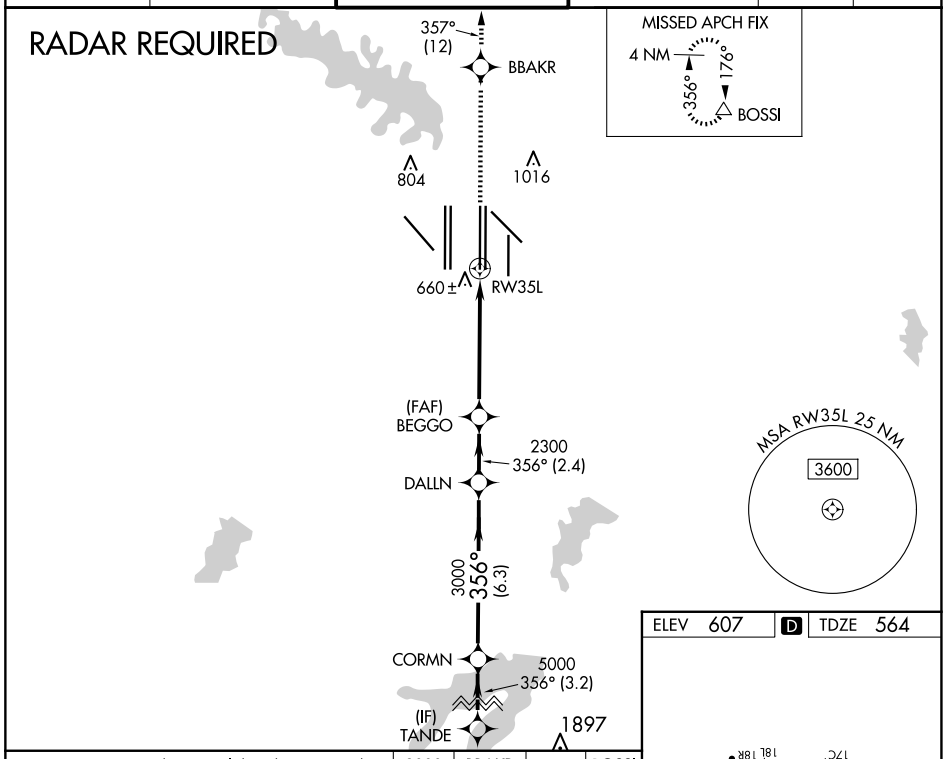

ELEV 607	D	TDZE 564

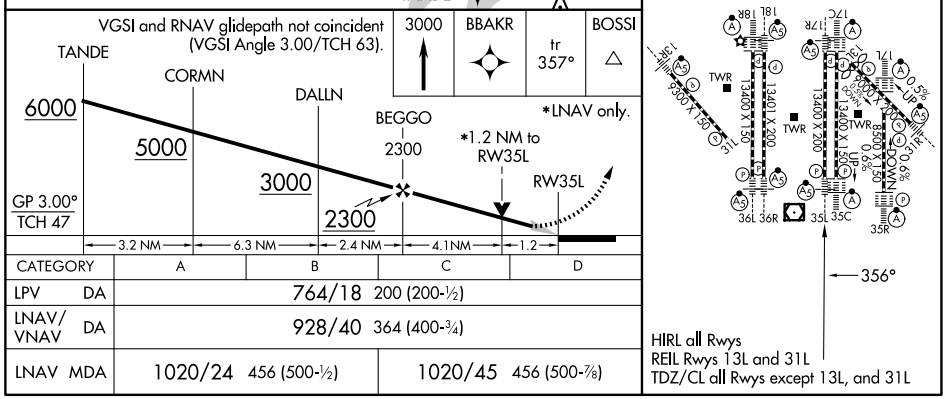

CATEGORY	A	B	C	D
LPV DA	764/18 200 (200-½)			
LNAV/VNAV DA	928/40 364 (400-¾)			
LNAV MDA	1020/24 456 (500-½)		1020/45 456 (500-⅞)	

SC-2, 19 FEB 2026 to 19 MAR 2026
SC-2, 19 FEB 2026 to 19 MAR 2026